



V550UC

DIESEL GENSET

MODEL	V550UC
Stand-by Power @ 60Hz	550kW / 688 kVA
Prime Power @ 60Hz	500 kW / 625 kVA

Standard Features

General features :

- Engine (VOLVO , TAD1642GE)
- Engine EPA Carb Charge alternator 24 V , Governor:Electronique
- Alternator (LEROY SOMER , LSA472M7)
- Single bearing alternator IP 23 , insulation class H /H
- Radiator 50°C [122°F]°C max. T° air inlet with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- Microprocessor control panel
- 24 V battery, rack and cable
- Industrial silencer (loose)
- User manual ^pCSA Certified (consult us)



Generator Ratings

Voltage	HZ	Phase	P.F	Standby Amps	Standby Ratings kW/kVA	Prime Ratings kW/kVA
480/277	60	3	0.8	828	550 / 688	500 / 625
440/254	60	3	0.8	903	550 / 688	500 / 625
240/120	60	3	0.8	1655	550 / 688	500 / 625
220/127	60	3	0.8	1680	512 / 640	465 / 582
600/347	60	3	0.8	662	550 / 688	500 / 625

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

Conditions of sale

- SDMO provides a full line of products with high quality recognized engines and alternators.
- Service and parts are available from SDMO distributors as a single source of responsibility.
- Each and every units is factory tested. All generator sets are also prototype tested.
- Warranty according to our standard conditions. Five years extended also available



ENGINE DATA

Manufacturer / Model	VOLVO TAD1642GE , 4-cycle, Turbo , Air/Air DC
Cylinder Arrangement	6 X L
Displacement	16.12L [983.7C.I.]
Bore and Stroke	144mm [5.7in.] X 165mm [6.5in.]
Compression ratio	16.5 : 1
Rated RPM	1800 Rpm
Piston Speed	9.9m/s [32.5ft./s]
Max. stand by Power at rated RPM	585kW [784BHP]
Frequency regulation, steady state	+/-0, 5%
BMEP	22.00bar [319psi]
Governor : type	Electronique

Exhaust System

Exhaust gas flow	1960L/s [4153cfm]
Exhaust temperature	512°C [954°F]
Max back pressure	1000mm CE [39in. WG]

Fuel System

110% (Stand By power)	148.89L/h [39.3gal/hr]
100% (of the Prime Power)	133.91L/h [35.4gal/hr]
75% (of the Prime Power)	97.07L/h [25.6gal/hr]
50% (of the Prime Power)	65.35L/h [17.3gal/hr]
Total fuel flow	200L/h [52.8gal/hr]

Oil System

Total oil capacity w/filters	48L [12.7gal]
Oil Pressure low idle	0.7bar [10.1psi]
Oil Pressure rated RPM	6.5bar [94.2psi]
Oil consumption 100% load	0.11L/h [0.0gal/hr]
Oil capacity carter	42L [11.1gal]

Thermal balance 100% load

Heat rejection to exhaust	500kW [28430Btu/mn]
Radiated heat to ambient	24kW [1365Btu/mn]
Heat rejection to coolant	248kW [14101Btu/mn]

Air intake

Max. intake restriction	500mm CE [20in. WG]
Engine air flow	776L/s [1644cfm]

Coolant System

Radiator & engine capacity	60L [15.9gal]
Max water temperature	103°C [217°F]
Outlet water temperature	93°C [199°F]
Fan power	19 kW
Fan air flow	8m ³ /s [16953cfm]
Available restriction on air flow	25mm CE [1.0in. WG]
Type of coolant	Glycol-Ethylene
Thermostat	86-96 °C

Emissions

HC	N/A
CO	N/A
Nox	N/A
PM	N/A



ALTERNATOR SPECIFICATIONS

GENERAL DATA

- Compliance with NEMA MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards.
- Vacuum-impregnated windings with epoxy varnish.
- IP21 drip proof.

ALTERNATOR DATA

Manufacturer / Type	LEROY SOMER LSA472M7
Number of phase	3
Power factor (Cos Phi)	0.8
Altitude	< 1000 m
Overspeed	2250 rpm
Pole : number	4
Exciter type	SHUNT
Insulation : class, temperature rise	H / H
Voltage regulator	R230
Sustained short circuit current	N/A
Total harmonics (TGH/THC)	< 2%
Wave form : NEMA = TIF – TGH/THC	< 50
Wave form : CEI = FHT – TGH/THC	< 2%
Bearing : number	1
Coupling	Direct
Voltage regulation 0 to 100% load	+/- 0.5%
Recovery time (20% Volt dip) ms	500 ms
SKVA with 90 % of nominal sustained voltage (at 0.4 PF)	N/A

OTHER ALTERNATOR DATA

Continuous nominal rating @ 40°C	625 kVA
Standby rating @ 27°C	700 kVA
Efficiencies @ 4/4 load	94.5 %
Air flow	1.1m ³ /s [2330.76cfm]
Short circuit ratio;50 (Kcc)	0.4
Direct axis synchro reactance unsaturated (Xd)	319 %
Quadra axis synchro reactance unsaturated (Xq)	191 %
Open circuit time constant;50 (T'do)	1930 ms
Direct axis transient reactance saturated (X'd)	16.5 %
Short circuit transient time constant (T'd)	100 ms
Direct axis subtransient reactance saturated (X''d)	13.2 %
Subtransient time constant (T''d)	10 ms
Quadra axis subtransient reactance saturated (X''q)	17.5 %
Zero sequence reactance unsaturated (Xo)	0.1 %
Negative sequence reactance saturated (X2)	15.4 %
Armature time constant (Ta)	15 ms
No load excitation current (io)	1 A
Full load excitation current (ic)	3.7 A
Full load excitation voltage (uc)	37 V
Recovery time (Delta U = 20% transitoire)	500 ms
Motor start (Delta = 20% perm. Or 50% trans.)	1318 kVA
Transient dip (4/4 charge) – PF : 1.8 AR	15 %
No load losses	10.08 kW
Heat rejection	28.63 kW

Control Panels

N/A

N/A


N/A

Options

<p>Engine and Radiator</p> <ul style="list-style-type: none"> Heat shield protection Oil drain extension Heavy duty air filter Lube oil drain pump Radiator core guard Battery charger Block heater 	<p>Alternator</p> <ul style="list-style-type: none"> Anti condensation heater Enforced impregnation Oversized alternator 	<p>Control panel</p> <ul style="list-style-type: none"> NFPA 110 level 1 Paralleling system Remote annunciator Oil temperature shutdown Key start panel
	<p>Exhaust</p> <ul style="list-style-type: none"> Residential silencer Critical silencer Flexible exhaust conn. 	<p>Literature</p> <ul style="list-style-type: none"> Parts Maintenance
<p>Fuel</p> <ul style="list-style-type: none"> Day tank Subbase fuel tanks UL Water separator fuel filter 	<p>Enclosure</p> <ul style="list-style-type: none"> M230 Silent 75.4 db @ 7m [23 Ft] (stby) 	

Weight and Dimensions

Open Model Excluding option

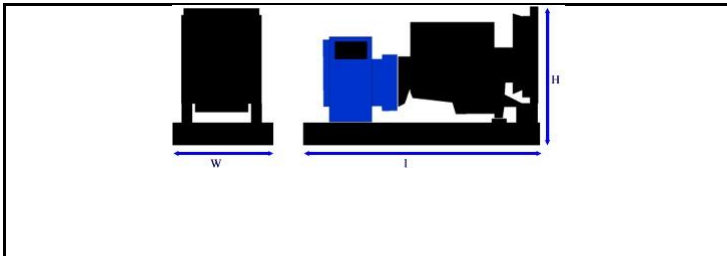


Overall size l x w x h :

3470mm [137in] x 1630mm [64in] x 2080mm [82in]

Weight :

3650kg [8045lbs] Net 4280kg [9433lbs] Brut

With Optional Enclosure



Overall size l x w x h :

5031mm [198in] x 1690mm [67in] x 2662mm [105in]

Weight :

5170kg [11395lbs] Net 5810kg [12805lbs] Brut