



T20UCM

DIESEL GENSET

MODEL	T20UCM
Stand-by Power @ 60Hz	20kW / 20 kVA
Prime Power @ 60Hz	18 kW / 18 kVA

Standard Features

General features :

- Engine (MITSUBISHI , S4Q2.Y262SD)
- Engine EPA Carb Charge alternator 12 V , Governor:Meca
- Alternator (MECC ALTE , ECO28VL)
- Single bearing alternator IP 23 , insulation class H /H
- Radiator 50°C [122°F]°C max. T° air inlet with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- Microprocessor control panel
- 12 V battery, rack and cable
- Industrial silencer (loose)
- User manual ^pCSA Certified (consult us)



Generator Ratings

Voltage	HZ	Phase	P.F	Standby Amps	Standby Ratings kW/kVA	Prime Ratings kW/kVA
240MONO	60	1	1	83	20 / 20	18 / 18

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

Conditions of sale

- SDMO provides a full line of products with high quality recognized engines and alternators.
- Service and parts are available from SDMO distributors as a single source of responsibility.
- Each and every units is factory tested. All generator sets are also prototype tested.
- Warranty according to our standard conditions. Five years extended also available



ENGINE DATA

Manufacturer / Model	MITSUBISHI S4Q2.Y262SD , 4-cycle, Athmo , N/A
Cylinder Arrangement	4 X L
Displacement	2.50L [152.6C.I.]
Bore and Stroke	88mm [3.5in.] X 103mm [4.1in.]
Compression ratio	22 : 1
Rated RPM	1800 Rpm
Piston Speed	6.18m/s [20.3ft./s]
Max. stand by Power at rated RPM	28.71kW [38BHP]
Frequency regulation, steady state	+/-2. 5%
BMEP	6.94bar [101psi]
Governor : type	Meca

Exhaust System

Exhaust gas flow	89L/s [189cfm]
Exhaust temperature	600°C [1112°F]
Max back pressure	680mm CE [27in. WG]

Fuel System

110% (Stand By power)	8.1L/h [2.1gal/hr]
100% (of the Prime Power)	7.4L/h [2.0gal/hr]
75% (of the Prime Power)	5.6L/h [1.5gal/hr]
50% (of the Prime Power)	4.1L/h [1.1gal/hr]
Total fuel flow	36L/h [9.5gal/hr]

Oil System

Total oil capacity w/filters	6.5L [1.7gal]
Oil Pressure low idle	1bar [14.5psi]
Oil Pressure rated RPM	5bar [72.5psi]
Oil consumption 100% load	0.08L/h [0.0gal/hr]
Oil capacity carter	5.5L [1.5gal]

Thermal balance 100% load

Heat rejection to exhaust	25kW [1422Btu/mn]
Radiated heat to ambient	3kW [171Btu/mn]
Heat rejection to coolant	23kW [1308Btu/mn]

Air intake

Max. intake restriction	200mm CE [8in. WG]
Engine air flow	34L/s [72cfm]

Coolant System

Radiator & engine capacity	8.1L [2.1gal]
Max water temperature	111°C [232°F]
Outlet water temperature	93°C [199°F]
Fan power	1.2 kW
Fan air flow	1m3/s [2119cfm]
Available restriction on air flow	10mm CE [0.4in. WG]
Type of coolant	Gencool
Thermostat	76.5-90 °C

Emissions

HC	N/A
CO	N/A
Nox	N/A
PM	N/A



ALTERNATOR SPECIFICATIONS

GENERAL DATA

- Compliance with NEMA MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards.
- Vacuum-impregnated windings with epoxy varnish.
- IP21 drip proof.

ALTERNATOR DATA

	MECC ALTE ECO28VL
Manufacturer / Type	
Number of phase	3
Power factor (Cos Phi)	0.8
Altitude	1000
Overspeed	rpm
Pole : number	4
Exciter type	No
Insulation : class, temperature rise	H / H
Voltage regulator	SR7/2
Sustained short circuit current	
Total harmonics (TGH/THC)	
Wave form : NEMA = TIF – TGH/THC	
Wave form : CEI = FHT – TGH/THC	
Bearing : number	1
Coupling	Direct
Voltage regulation 0 to 100% load	
Recovery time (20% Volt dip) ms	ms
SkVA with 90 % of nominal sustained voltage (at 0.4 PF)	N/A

OTHER ALTERNATOR DATA

Continuous nominal rating @ 40°C	36 kVA
Standby rating @ 27°C	36,3 kVA
Efficiencies @ 4/4 load	86.5 %
Air flow	5.8m3/s [12289.45cfm]
Short circuit ratio;50 (Kcc)	0.62
Direct axis synchro reactance unsaturated (Xd)	165 %
Quadra axis synchro reactance unsaturated (Xq)	71 %
Open circuit time constant;50 (T'do)	0.93 ms
Direct axis transient reactance saturated (X'd)	15.4 %
Short circuit transient time constant (T'd)	46 ms
Direct axis subtransient reactance saturated (X''d)	8.8 %
Subtransient time constant (T''d)	12 ms
Quadra axis subtransient reactance saturated (X''q)	19 %
Zero sequence reactance unsaturated (Xo)	2.8 %
Negative sequence reactance saturated (X2)	13.2 %
Armature time constant (Ta)	11 ms
No load excitation current (io)	A
Full load excitation current (ic)	A
Full load excitation voltage (uc)	V
Recovery time (Delta U = 20% transitoire)	ms
Motor start (Delta = 20% perm. Or 50% trans.)	kVA
Transient dip (4/4 charge) – PF : 1.8 AR	%
No load losses	kW
Heat rejection	kW

Control Panels

NEXYS



Specifications :

- Frequency meter, Ammeter, Voltmeter
- Alarms and faults Oil pressure, water temperature, Overcrank, Overspeed (>60 kVA), Min/max alternator, Low fuel level, Emergency stop
- Engine parameters Hours counter, Engine speed, Battery voltage, Fuel level, Air preheating

TELYS



Specifications :

- Frequency meter, Ammeter, Voltmeter
- Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop
- Engine parameters Hours counter, Oil pressure, Water temperature, Engine speed, Battery voltage, Fuel level

Options

Engine and Radiator

- Heat shield protection
- Oil drain extension
- Heavy duty air filter
- Lube oil drain pump
- Radiator core guard
- Battery charger
- Block heater

Alternator

- Anti condensation heater
- Enforced impregnation
- Oversized alternator

Control panel

- • NFPA 110 level 1
- • Paralleling system
- • Remote annunciator
- • Oil temperature shutdown
- Key start panel

Exhaust

- Residential silencer
- Critical silencer
- Flexible exhaust conn.

Literature

- • Parts
- • Maintenance

Fuel


- Day tank
- Subbase fuel tanks UL
- Water separator fuel filter

Enclosure

- M127
- Silent 67 db @ 7m [23 Ft] (stby)

Weight and Dimensions


Open Model Excluding option

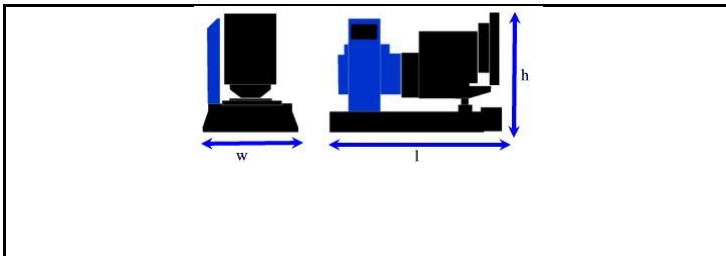

Overall size l x w x h :
1700mm [67in] x 896mm [35in] x 1121mm [44in]

Weight :
580kg [1278lbs] Net 680kg [1499lbs] Brut

With Optional Enclosure

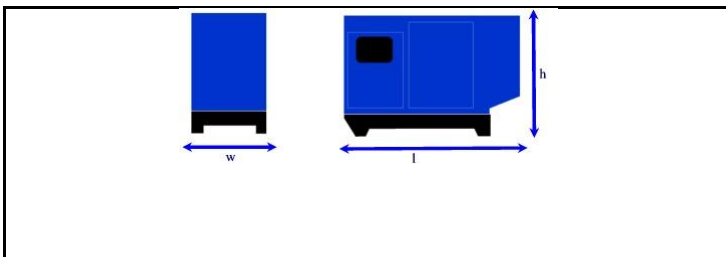

Overall size l x w x h :
2080mm [82in] x 904mm [36in] x 1415mm [56in]

Weight :
810kg [1785lbs] Net 910kg [2006lbs] Brut