


STAMFORD®

UCI224C - Winding 06

Technical Data Sheet

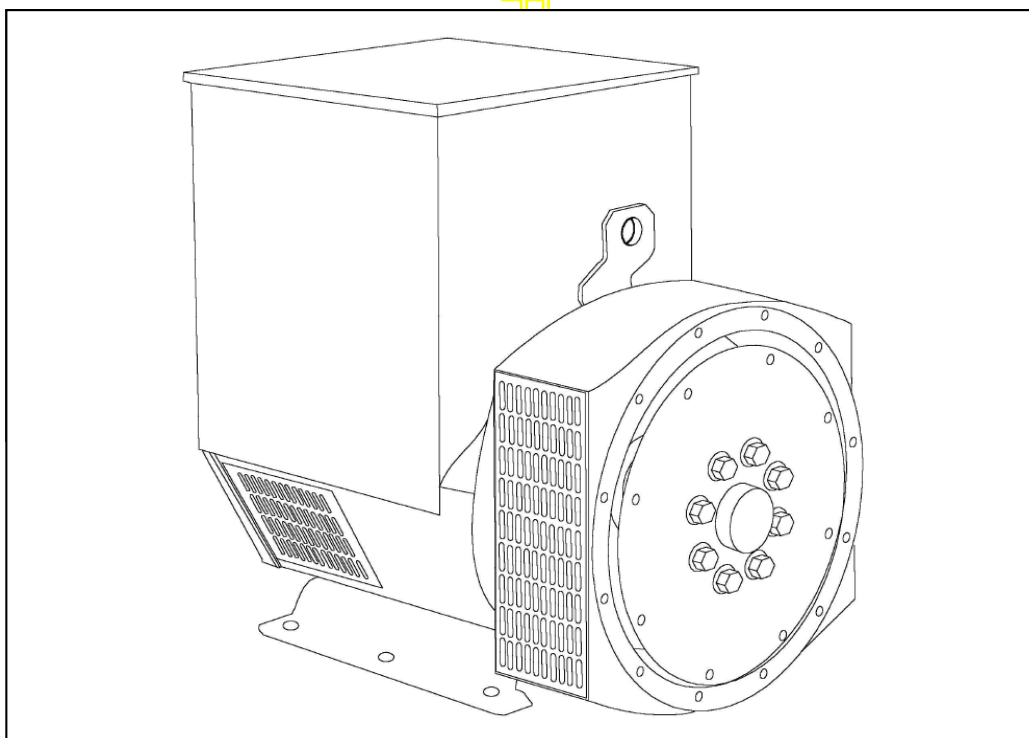

UCI224C

SPECIFICATIONS & OPTIONS

STAMFORD

STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

VOLTAGE REGULATORS

SX460 AVR - STANDARD

With this self excited control system the main stator supplies power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semiconductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three phase full wave bridge rectifier. This rectifier is protected by a surge suppressor against surges caused, for example, by short circuit.

AS440 AVR

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally over voltage protection built-in and short circuit current level adjustments as an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Dedicated Single Phase windings have 4 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

DE RATES

All values tabulated on page 7 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5 C by which the operational ambient temperature exceeds 40 C.

Note: Requirement for operating in an ambient exceeding 60 C must be referred to the factory.

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

UCI224C

STAMFORD**WINDING 06**

CONTROL SYSTEM		SEPARATELY EXCITED BY P.M.G.	
A.V.R.	MX341	MX321	
VOLTAGE REGULATION	± 1%	± 0.5 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 6)		

CONTROL SYSTEM		SELF EXCITED	
A.V.R.	SX460	AS440	
VOLTAGE REGULATION	± 1.0 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT		

INSULATION SYSTEM		CLASS H	
PROTECTION		IP23	
RATED POWER FACTOR		0.8	
STATOR WINDING		SINGLE LAYER CONCENTRIC	
WINDING PITCH		TWO THIRDS	
WINDING LEADS		4	
MAIN STATOR RESISTANCE		0.059 Ohms AT 22°C SERIES CONNECTED	
MAIN ROTOR RESISTANCE		0.59 Ohms at 22°C	
EXCITER STATOR RESISTANCE		21 Ohms at 22°C	
EXCITER ROTOR RESISTANCE		0.071 Ohms PER PHASE AT 22°C	
R.F.I. SUPPRESSION		BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others	
WAVEFORM DISTORTION		NO LOAD < 1.5% NON-DISTORTING LINEAR LOAD < 5.0%	
MAXIMUM OVERSPEED		2250 Rev/Min	
BEARING DRIVE END		BALL. 6312-2RS (ISO)	
BEARING NON-DRIVE END		BALL. 6309-2RS (ISO)	
	1 BEARING	2 BEARING	
WEIGHT COMP. GENERATOR	271 kg	280 kg	
WEIGHT WOUND STATOR	75 kg	75 kg	
WEIGHT WOUND ROTOR	78.95 kg	70.58 kg	
WR² INERTIA	0.3987 kgm ²	0.3667 kgm ²	
SHIPPING WEIGHTS in a crate	294 kg	301 kg	
PACKING CRATE SIZE	97 x 57 x 96(cm)	97 x 57 x 96(cm)	
TELEPHONE INTERFERENCE	THF<2%	TIF<50	
COOLING AIR	0.281 m³/sec 595 cfm		
VOLTAGE SERIES	220	230	240
VOLTAGE PARALLEL	110	115	120
kVA BASE RATING FOR REACTANCE VALUES	37.5	37.5	37.5
Xd DIR. AXIS SYNCHRONOUS	3.93	3.60	3.30
X'd DIR. AXIS TRANSIENT	0.28	0.26	0.24
X''d DIR. AXIS SUBTRANSIENT	0.20	0.18	0.17
Xq QUAD. AXIS REACTANCE	1.81	1.66	1.52
X''q QUAD. AXIS SUBTRANSIENT	0.19	0.17	0.16
XL LEAKAGE REACTANCE	0.13	0.12	0.11
X2 NEGATIVE SEQUENCE	0.19	0.17	0.16
X0 ZERO SEQUENCE	0.13	0.12	0.11




REACTANCES ARE SATURATED		VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED	
T'd TRANSIENT TIME CONST.	0.025s		
T''d SUB-TRANSTIME CONST.	0.006s		
T'do O.C. FIELD TIME CONST.	0.65s		
Ta ARMATURE TIME CONST.	0.005s		
SHORT CIRCUIT RATIO	1/Xd		

UCI224C

Winding 06

STAMFORD

SINGLE PHASE EFFICIENCY CURVES

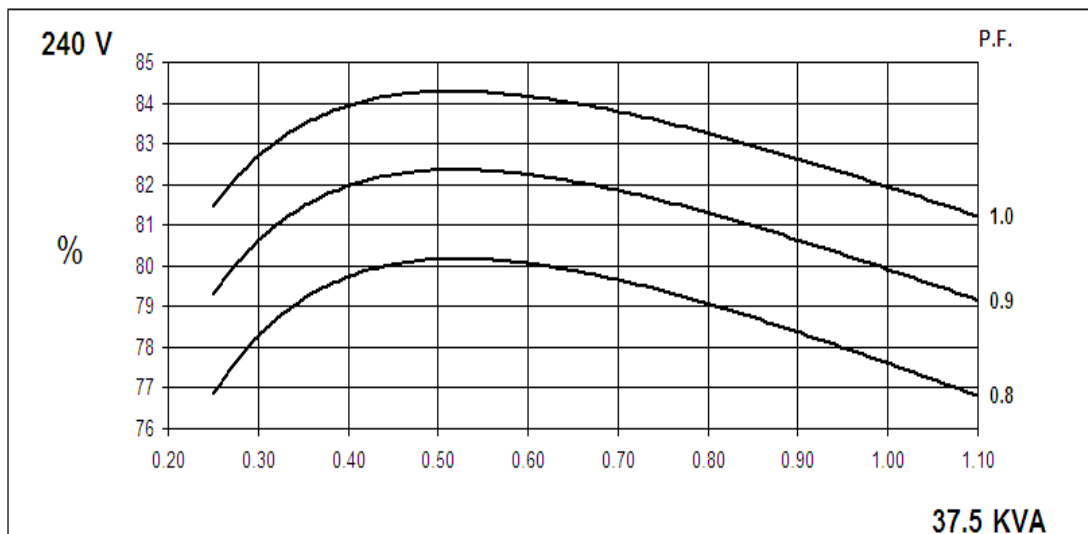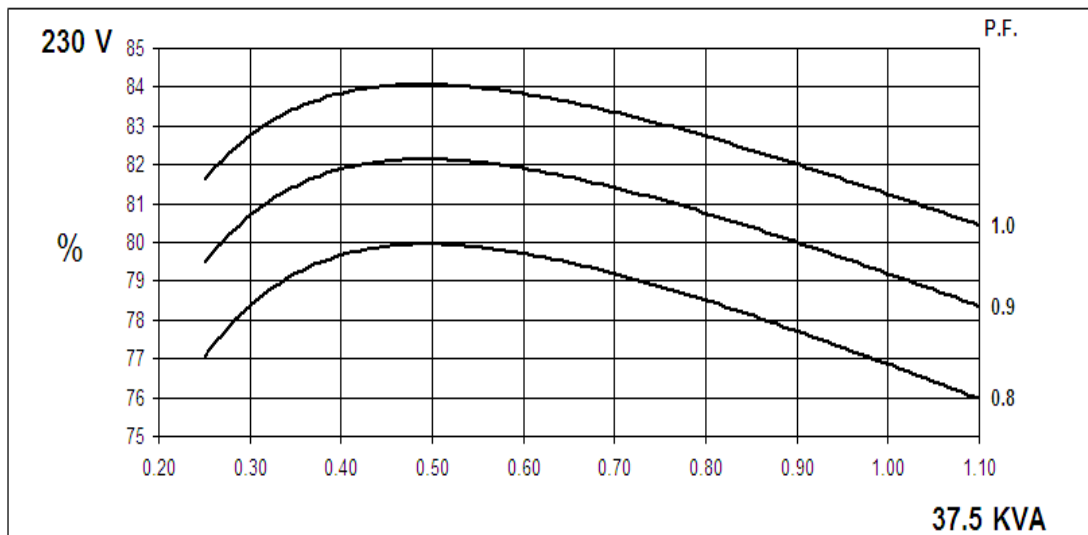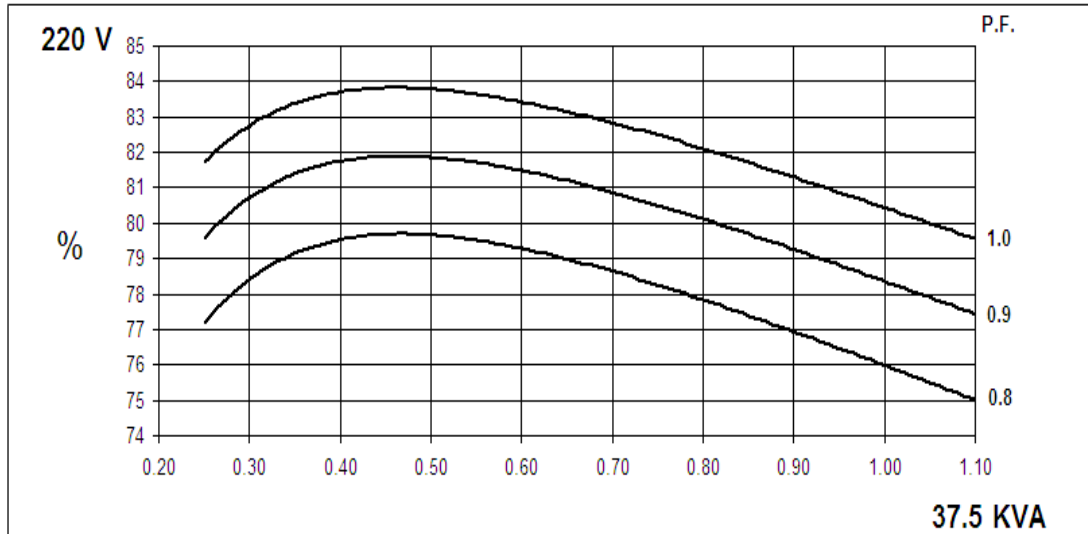


UCI224C

Winding 06


STAMFORD

SX


Locked Rotor Motor Starting Curves

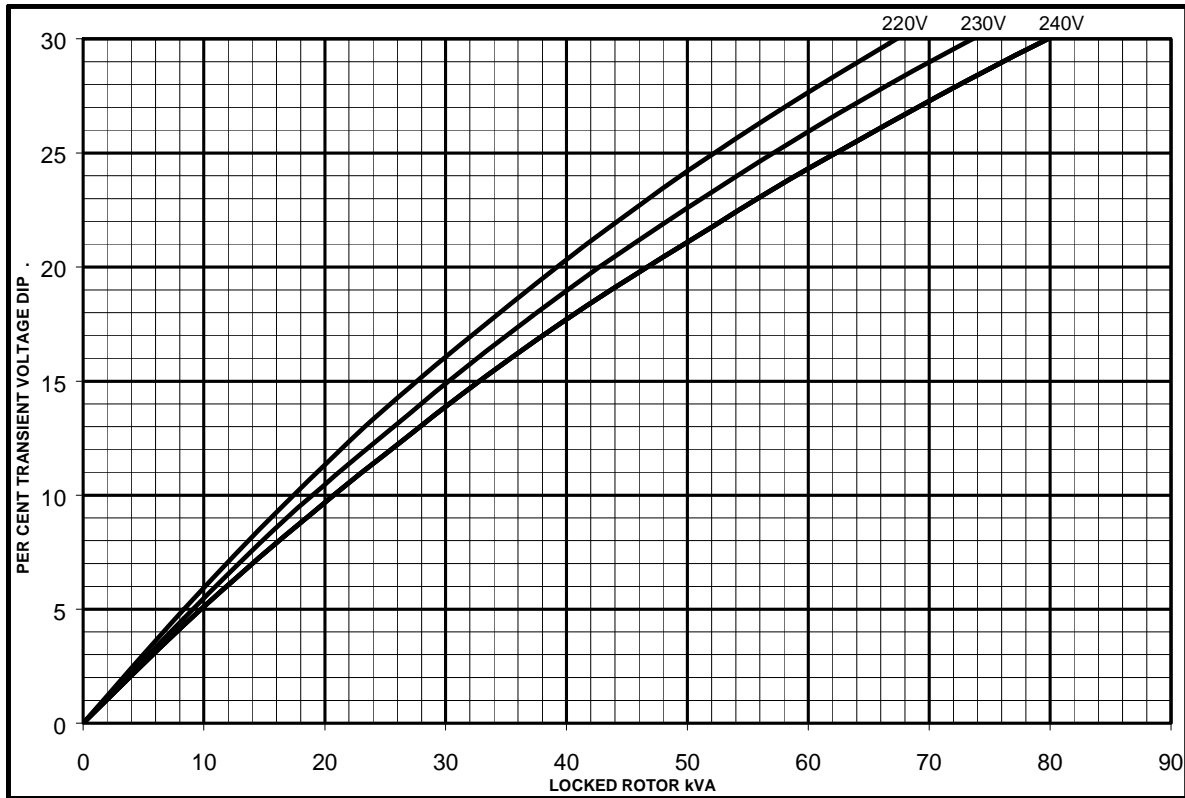

MX

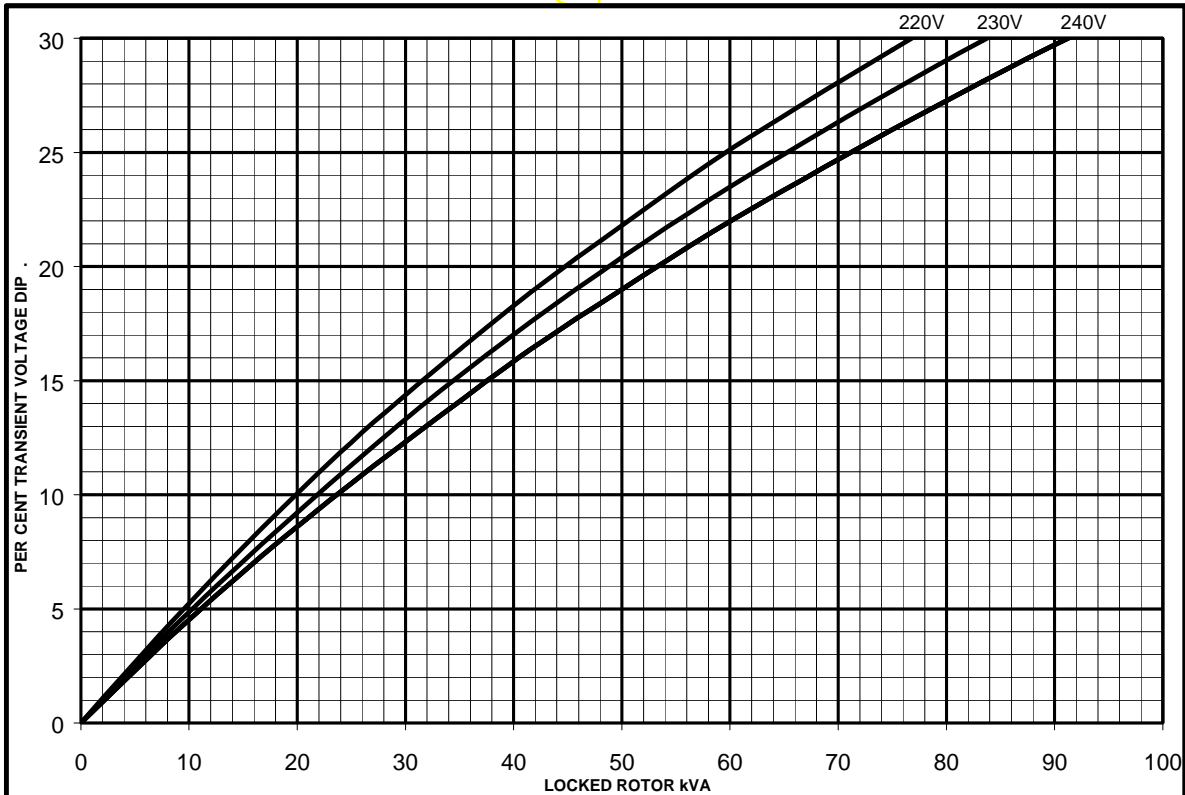

**Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on series connection.**

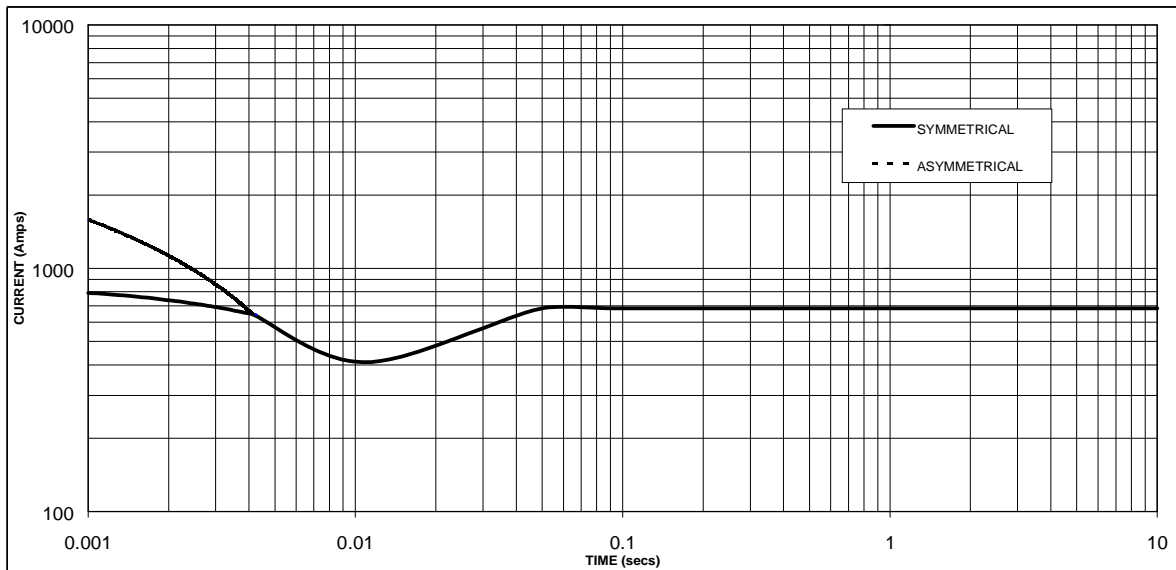

Sustained Short Circuit = 685 Amps

Note

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

Voltage	Factor
220V	X 1.00
230V	X 1.05
240V	X 1.09

The sustained current value is constant irrespective of voltage level

UCI224C

Winding 06


STAMFORD

60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C 0.8pf			Cont. H - 125/40°C 0.8pf			Cont. F - 105/40°C 1.0pf			Cont. H - 125/40°C 1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	33.8	33.8	33.8	37.5	37.5	37.5	33.8	33.8	33.8	37.5	37.5	37.5
kW	27.0	27.0	27.0	30.0	30.0	30.0	33.8	33.8	33.8	37.5	37.5	37.5
Efficiency (%)	76.9	77.8	78.4	76.0	76.9	77.6	81.3	82.0	82.6	80.4	81.2	81.9
kW Input	35.2	34.8	34.5	39.5	39.0	38.7	41.6	41.2	40.9	46.6	46.2	45.8

APPROVE
DIMENSIONS

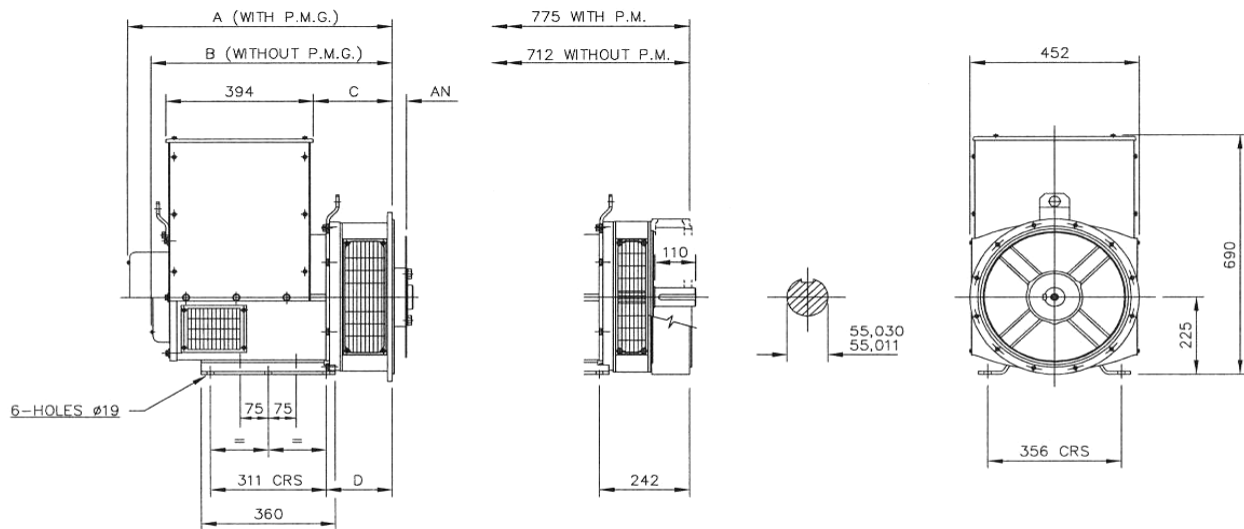

SINGLE BEARING MACHINES ONLY						
ADAPTOR	A	B	C	D	COUPLING DISCS	AN
SAE 1	724,3	661,3	224,3	191,3	SAE 8	61,90
SAE 2	710	647	210	177	SAE 10	53,98
SAE 3	710	647	210	177	SAE 11,5	39,68
SAE 4	710	647	210	177	SAE 14	25,40

APPROVED DOCUMENT

STAMFORD

Head Office Address:
Barnack Road, Stamford
Lincolnshire, PE9 2NB
United Kingdom
Tel: +44 (0) 1780 484000
Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

UCI224C-06-TD-EN-SG-A