



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

GP-J225-60T3

JOHN DEERE 6090HF484-2345 Engine
US EPA Tier 3 (EPA Stationary Emergency)
LEROY SOMER TAL-046-G Alternator
DEEPSEA DSE7320 Controller

225 KW JOHN DEERE GENERATOR

225 KW 281 KVA JOHN DEERE Diesel Generator Set, Fully packaged:

- JOHN DEERE Heavy duty diesel engine, 4 stroke, 1800rpm, Electronic
- US EPA Tier 3 compliant engine for Stationary Emergency application
- LEROY SOMER alternator. IP23 protection, Insulation class H
- Main line circuit breaker, maximum output rated for complete protection
- Digital auto-start/stop control panel. CE and UL compliant
- Incorporated metallic fuel tank for day use. Electronic fuel level sender
- Auto Start control feature included for interoperation with ATS/AMF
- 12V charging alternator and 12V DC electric starter motor
- 12V charged DC starting battery with electrolyte and cables
- Dry type air filter, fuel filter and oil filter elements installed
- Mechanically welded chassis with vibration isolators
- Each unit prototype and individually factory load bank tested
- The generator accepts 100% rated load in one step as per NFPA110 and meets ISO8528-5 class G-3 for transient response
- Compliant with ISO3046, ISO8528, BS4999, BS5514, BS5000PT99, AS1359, IEC34, UTE5100, VDE0530 and ISO9001:2000

AVAILABLE ACCESSORIES AND OPTIONS:

- Steel or Aluminum weather proof, sound attenuated enclosures
- UL142 listed, double wall fuel tanks from 50 to 10,000 Gal
- UL1008 listed, automatic transfer switches from 50 to 3000 Amp
- D.O.T. compliant heavy duty road trailers from 3000 to 30000 Lbs
- Automatic battery chargers, Engine preheaters, Remote annunciators and many more



Voltage	Power ESP kWe/kVA	Power PRP kWe/kVA	Standby Amps	Prime Amps	Phase
480/277	225 / 281	200 / 250	338	301	3
460/265	225 / 281	200 / 250	353	314	3
440/254	225 / 281	200 / 250	369	328	3
240/120 DELTA	225 / 281	200 / 250	677	601	3
220/127	225 / 281	200 / 250	738	656	3
208/120	225 / 281	200 / 250	781	694	3

POWER DEFINITION

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

TERM OF USE

Standard reference conditions ESP/PRP 25 C°/25 C° Air Intlet Temp, 1000 m/1000 m m A.S.L. 60 % relative humidity.



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58


www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

JOHN DEERE DIESEL ENGINE SPECIFICATIONS

GENERAL DATA	Engine model	JOHN DEERE 6090HF484, TURBOCHARGED & AFTERCOOLED (air-to-air), U.S. EPA Tier 3
	Cylinders-arrangement	6-L
	Displacement	9L
	Bore (mm) X Stroke (mm)	118.4 X 136
	Compression ratio	16.0:1
	Speed (RPM)	1800
	Maximum stand-by power at rated RPM (kW)	258KW (346HP)
	Governor	ELECTRONIC
FUEL SYSTEM	Fuel consumption 100% Prime load	58.5 L/hr [15.5 Gal/hr]
	Fuel consumption 75% Prime load	51.7 L/hr [13.7 Gal/hr]
	Fuel consumption 50% Prime load	37.6 L/hr [9.9 Gal/hr]
FUEL RUNTIME AUTONOMY	Integral Tank (132 Gal)	9 Hours @ 75% Prime Load 8 Hours @ 100% Prime Load
	External Tank (200 Gal)	14 Hours @ 75% Prime Load 13 Hours @ 100% Prime Load
	External Tank (350 Gal)	25 Hours @ 75% Prime Load 22 Hours @ 100% Prime Load
	External Tank (500 Gal)	35 Hours @ 75% Prime Load 31 Hours @ 100% Prime Load
	External Tank (500 Gal)	35 Hours @ 75% Prime Load 31 Hours @ 100% Prime Load
U.S. EPA COMPLIANCE	EPA Tier	U.S. EPA Tier 3
	Mobile Prime application	No, does not comply, Tier 3 Flex / Tier 4 Final only
	Stationary Standby application	Yes, compliant for Stationary Emergency applications
	Stationary Prime application	No, does not comply, Tier 4 Final only
	Additional Information and purchasing guide Click here	

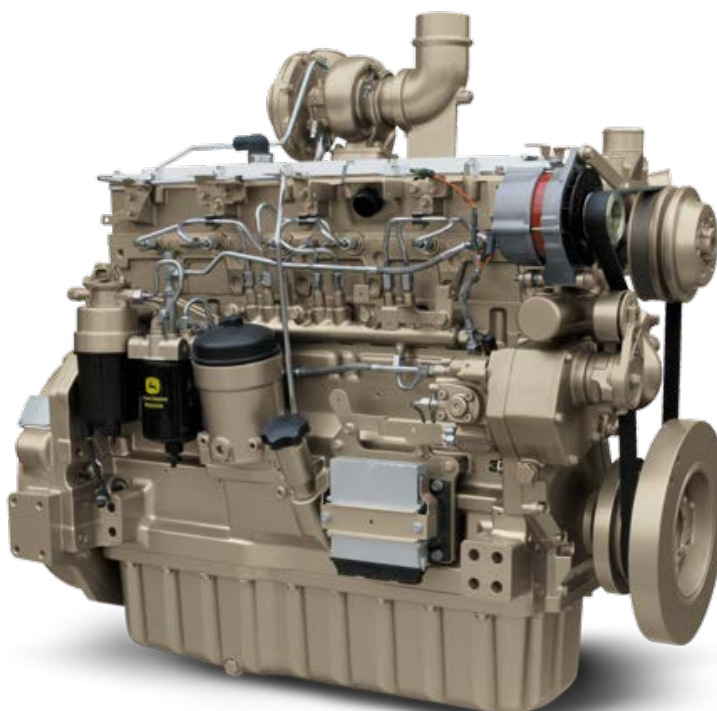

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

LEROY SOMER ALTERNATOR SPECIFICATIONS

GENERAL DATA	Alternator brand	LEROY SOMER
	Alternator	TAL-046-G
	Number of phase	3
	Power factor (Cos Phi)	0.8
	Altitude (m)	<1000
	Overspeed (rpm)	2250
	Number of pole	4
	Excitation system	Self Excited (P.M.G. Optional)
	Insulation class / Temperature class	H / H
	Automatic Voltage Regulator	LEROY SOMER R250 AVR
	Coupling	Direct / Single Bearing
	Voltage regulation 0 to 100%	+/-1.0%



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

GENERATOR CONTROL PANELS

Standard

DEEPSEA DSE 7320: Digital + Auto start/stop



The Deepsea DSE 7320 control features both Manual and Automatic start/stop control of the generator and full CANBUS connectivity for control and protection. The 132x64 LCD display, Emergency stop button and five key menu are highly ergonomic and intuitive.

- Fully configurable via a free downloadable PC software
- 250 events log including date and time make fault finding effortless
- Remote monitoring and control via Ethernet/RS485 and SMS messaging via GSM/SIM card options available
- Coolant temperature and Oil pressure alarm/shutdown
- Oil pressure and low pressure alarm/shutdown
- Oil temp, hours, battery charge, Frequency, Kw, KVA and PF display
- Voltage under/over protection, Amp over current protection, and More!

Option

DEEPSEA DSE 8610: Digital + Auto start/stop + Paralleling



The Deepsea DSE 8610 control features all the excellent capabilities of the DSE 7320 combined with easy to use multi-generator load sharing:

- Up to 32 generators paralleling
- Peak lopping
- Sequential starting of generator sets
- Manual voltage/frequency adjustments
- Automatic hours run balancing
- Generator load demand
- Dead bus sensing and Bus failure detection
- Voltage frequency matching
- And many more highly programmable paralleling features

GENERATOR ACCESSORIES AND OPTIONS

Option

Automatic Transfer Switches, UL1008 listed: 100 to 4000A



With a Series 300 transfer switch, you get a product backed by ASCO Power Technologies, the industry leader

- True double-throw operation: single solenoid design is inherently interlocked & prevents contacts from stopping between sources
- Easy-to-read flush-mounted control and display panel provides LED indicators for switch position and source availability
- Standard engine exerciser for weekly automatic testing with or without load
- UL 1008 listed for Transfer Equipment and CSA C22.2 listed
- NFPA 110 for Emergency & Standby Power & the National Electrical (NEC) Articles 700, 701 and 702

Option

Fuel Tanks, UL142 listed: 50 to 5000 GAL



- UL listed. Secondary containment tank meeting UL 142 tank requirements
- NFPA compliant. Designed to comply with the installation standards of NFPA 30 and NFPA 37
- Emergency pressure relief vents. Meets UL requirements; ensures adequate venting of inner and outer tank under extreme pressure and/or emergency conditions
- Electrical stub-up area with removable end channel
- Normal vent • Inner tank emergency vent sized to UL 142 specs
- Direct reading mechanical fuel gauge • Fuel in basin switch
- Satin black paint finish



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

GP-6090

Weatherproof / Super Silent Enclosure

STANDARD FEATURES

- 12 gauge electro-zinc powder coated steel for maximum corrosion resistance (Phosphatizing degreasing, Non-chromic passivation, Osmosis purified rinsing and High durability polyester resin thermosetting powder paint)
- 29dB(A) Internal-mounted critical silencer and flexible exhaust connector offering maximum component life and operator safety
- Fade-, scratch-, and corrosion-resistant. Automotive-grade textured finish resulting in advanced corrosion and abrasion protection as well as enhanced edge coverage and color retention
- Up to 51mm (2in) Acoustic insulation with hydrocarbon sealing film that meets FMVSS 302 flammability classification and repels moisture absorption
- Interchangeable modular panel construction. Allows complete serviceability or replacement without compromising enclosure design
- Service access. Multi-personnel doors for easy access to generator set controller, breaker and service points
- Externally mounted emergency stop button, Single point lifting hook and Tamper proof "securit" viewing control window
- Cooling air discharge. Weather protective design featuring a vertical air discharge outlet grille. Redirects cooling air up and above enclosure to reduce ambient noise
- Cooling/combustion air intake with a horizontal air inlet. Sized for maximum cooling airflow
- Heavy duty Polyamide plastic hinges, Dichromate galvanized bolting and Stainless steel rivets for lifetime longevity
- Meets and exceeds NFX41002 Salt spray test, NFT30049 UV Performance test, NFT30038 Paint adhesion test and 2000/14EC Low sound directives



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

RIGHT SIDE VIEW



RIGHT SIDE VIEW



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

LEFT SIDE VIEW



LEFT SIDE VIEW



GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com




Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

RIGHT SIDE VIEW



LEFT SIDE VIEW

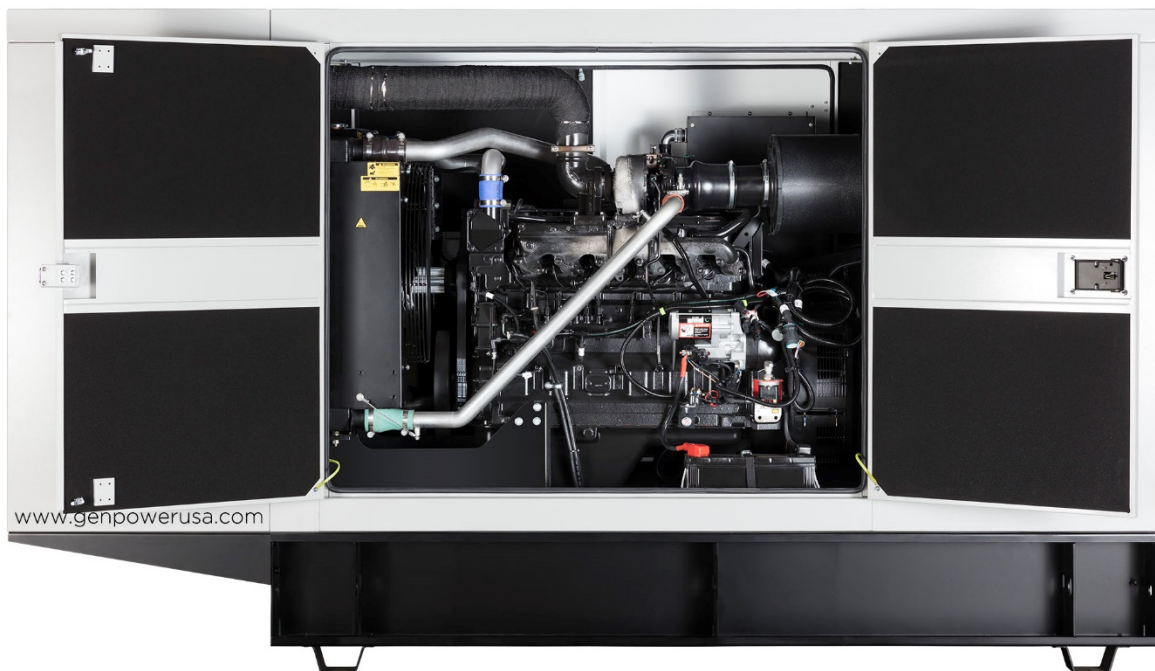

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com