

FOR INDIVIDUAL GEN SET MODEL TYPES SEE BROADCAST LITERATURE





GENERATOR IS TO BE PLACED ON A FLAT FLOOR OR CONCRETE BASE

FUEL CAPACITY:

INTEGRAL = 665 Litres


BUNDED = 615 Litres

Gen Set Model	Engine	Alternator	Oil Capacity (L)	Coolant Capacity (L)	Weight (Dry)	Weight (Wet)
BCC 240-60 T3/F	QSL9 G2	UCDI 274 J	26.5	39.4	3556	4202
BCC 250-60 T3/F	QSL9 G3	UCDI 274 K	26.5	39.4	3556	4202
BCC 275-60 T3/F	QSL9 G4	HCI 444 D	34	43.5	3776	4422
BCC 300-60 T3/F	QSL9 G5	HCI 444 D	26.5	39.4	3776	4422

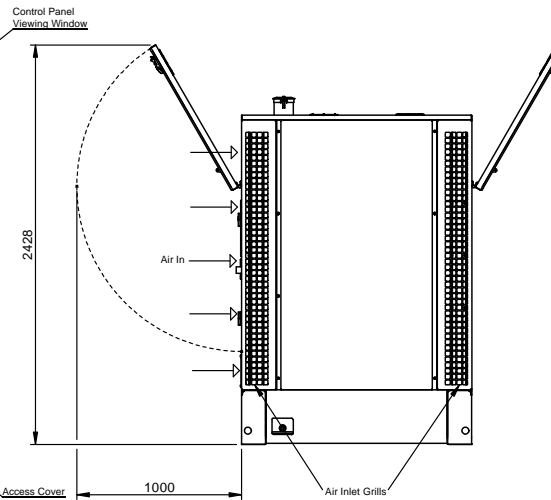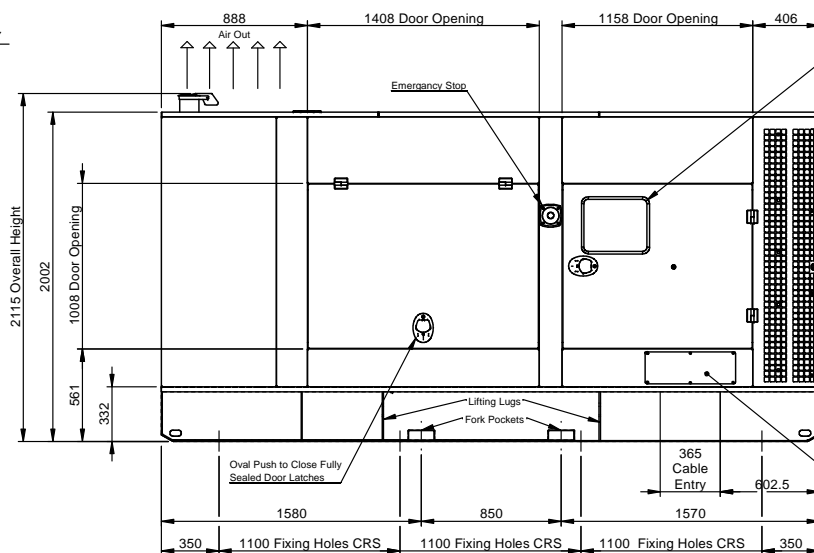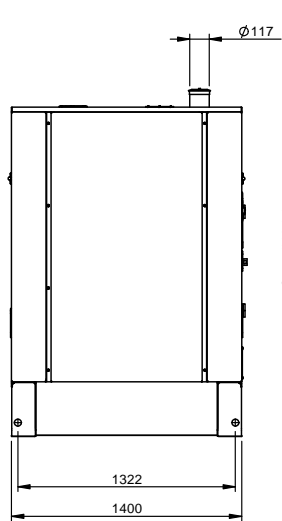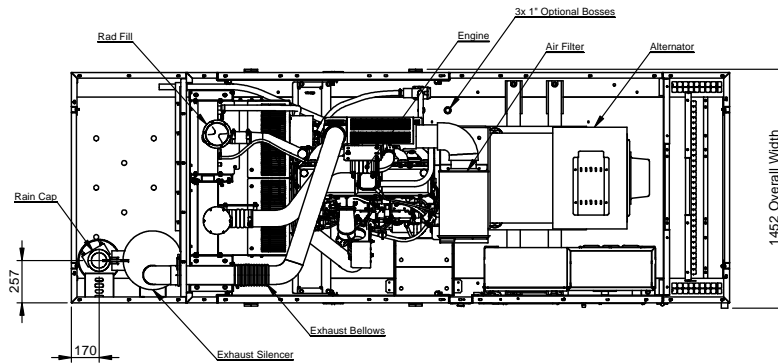

A	New Drawing.	L.R	24.06.13
---	--------------	-----	----------

REV	DETAILS	APP'D	DATE
-----	---------	-------	------

NOTES - MECHANICAL
 TOLERANCES:
 GENERAL TOLERANCES: +/- 5mm
 FABRICATION: +/- 3mm
 HOLE CENTRES: +/- 1mm
 OTHER TOLERANCES AS OTHERWISE STATED WHERE REQUIRED
 GEOMETRICAL AND OTHER TOLERANCES AS STATED.

 THIRD ANGLE PROJECTION

DESCRIPTION	
C4AR QSL9 Series 60Hz Sales GA	
SHEET 1 of 1	
CREATED BY:	L.Richards
DATE:	24.06.13
MODIFIED BY:	
DATE:	
CHECKED BY:	s.Bean
DATE:	
ISSUE:	A

DRAWING No:
CGA049

 Broadcrown Limited (Group Headquarters)
 Airfield Industrial Estate, Hixon, Stafford,
 ST18 0PF, United Kingdom.
 telt: +44 (0) 1889 272200
 www.broadcrown.com

MATERIAL:	
FINISH:	