

LSA 49.3

Low Voltage Alternator - 4 pole

660 to 1000 kVA - 50 Hz / 825 to 1250 kVA - 60 Hz
Electrical and mechanical data

LEROY-SOMER™

Nidec
All for dreams

Specially adapted to applications

The LSA 49.3 alternator is designed to be suitable for typical generator applications, such as: backup, prime power, cogeneration, marine applications, rental, telecommunications, etc.

Compliant with international standards

The LSA 49.3 alternator conforms to the main international standards and regulations:

- IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446 (UL 1004 on request), marine regulations, etc.

It can be integrated into a CE marked generator.

The LSA 49.3 is designed, manufactured and marketed in an ISO 9001 and ISO 14001 environment.

Top of the range electrical performance

- Class H insulation
- Standard 6 wire re-connectable winding, 2/3 pitch, type no. 6S (12 wire on request)
- Voltage range 50 Hz: 380V - 400V - 415V and 220V - 230V - 240V
- Voltage range 60 Hz: 380V - 416V - 440V - 480V and 220V - 240V
- High efficiency and motor starting capacity
- Other voltages are possible with optional adapted windings:
 - 50 Hz : 440 V (n° 7), 500 V (n° 9), 600 V (n° 22 or 23), 690 V (n° 10 or 52)
 - 60 Hz : 380 V and 416 V (n° 8), 600 V (n° 9)
- R 791 interference suppression conforming to standard EN 61000-6-3, EN 61000-6-2, EN 55011 group 1 class B standard for European zone (CE marking)

Excitation and regulation system suited to the application

Excitation system			Regulation options			
Volage regulator	AREP	PMG (option)	C.T. Current transformer for paralleling	Mains paralleling	3-phase sensing	Remote voltage potentiometer
D350	Standard	Standard	√	-	√	√
D510 C	Option	Option	√	√	√	√

√: Possible option

Protection system suited to the environment

- The LSA 49.3 is IP 23
- Standard winding protection for clean environments with relative humidity $\leq 95\%$, including indoor marine environments
 - Options : - Filters on air inlet : derating 5%
 - Filters on air inlet and air outlet (IP 44) : derating 10%
 - Winding protections for harsh environments and relative humidity greater than 95%
 - Space heaters
 - Thermal protection for winding and shields

Reinforced mechanical structure using finite element modelling

- Compact and rigid assembly to better withstand generator vibrations
- Steel frame
- Cast iron flanges and shields
- Twin-bearing and single-bearing versions designed to be suitable for engines on the market
- Half-key balancing
- Sealed for life ball bearings, regreasable bearings (optional)
- Standard direction of rotation: clockwise when looking at the drive end view (for anti-clockwise, derate the machine by 5%)

Accessible terminal box proportioned for optional equipment

- Easy access to the voltage regulator and to the connections
- Possible inclusion of accessories for paralleling, protection and measurement
- Connection bar for reconnecting voltage

General characteristics

Insulation class	H	Excitation system	AREP / PMG
Winding pitch	2/3 (winding 6S)	AVR type	D350
Number of wires	6 (12 option)	Voltage regulation (*)	± 0.25%
Protection	IP 23	Short-circuit current	300% (3 IN) : 10s
Altitude	≤ 1000 m	Total Harmonic distortion THD (**)	at no load < 4% - on load < 4%
Overspeed	2250 min ⁻¹	Waveform: NEMA = TIF (**)	< 50
Air flow	1 m ³ /s (50Hz) / 1.2 m ³ /s (60Hz)	Waveform: IEC = THF (**)	< 2%

(*) Steady state. (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)






Ratings 50 Hz - 1500 R.P.M.

kVA / kW - P.F. = 0.8																
Duty/T°C	Continuous duty/40°C				Continuous duty/40°C				Stand-by/40°C				Stand-by/27°C			
Class/T°K	H/125°K				F/105°K				H/150°K				H/163°K			
Phase	3 ph.				3 ph.				3 ph.				3 ph.			
Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Δ	220V	230V	240V		220V	230V	240V		220V	230V	240V		220V	230V	240V	
YY			220V				220V				220V				220V	
49.3 S4 kVA	-	660	-	620	-	595	-	560	-	725	-	685	-	745	-	715
kW	-	528	-	496	-	476	-	448	-	580	-	548	-	596	-	572
49.3 M6 kVA	-	730	-	665	-	660	-	600	-	780	-	730	-	810	-	765
kW	-	584	-	532	-	528	-	480	-	624	-	584	-	648	-	612
49.3 M8 kVA	-	820	-	810	-	760	-	710	-	910	-	885	-	945	-	925
kW	-	656	-	648	-	608	-	568	-	728	-	708	-	756	-	740
49.3 L9 kVA	-	910	-	820	-	820	-	740	-	1000	-	920	-	1020	-	965
kW	-	728	-	656	-	656	-	592	-	800	-	736	-	816	-	772
49.3 L10 kVA	-	1000	-	950	-	900	-	840	-	1085	-	1030	-	1130	-	1080
kW	-	800	-	760	-	720	-	672	-	868	-	824	-	904	-	864

Ratings 60 Hz - 1800 R.P.M.

kVA / kW - P.F. = 0.8																
Duty/T°C	Continuous duty/40°C				Continuous duty/40°C				Stand-by/40°C				Stand-by/27°C			
Class/T°K	H/125°K				F/105°K				H/150°K				H/163°K			
Phase	3 ph.				3 ph.				3 ph.				3 ph.			
Y	380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V
Δ	220V	240V			220V	240V			220V	240V			220V	240V		
YY		208V	220V	240V		208V	220V	240V		208V	220V	240V		208V	220V	240V
49.3 S4 kVA	653	715	756	825	588	644	681	743	693	758	802	875	718	787	832	908
kW	522	572	605	660	470	515	545	594	554	606	642	700	574	630	666	726
49.3 M6 kVA	725	795	840	915	655	715	760	825	770	845	890	970	800	875	925	1005
kW	580	636	672	732	524	572	608	660	616	676	712	776	640	700	740	804
49.3 M8 kVA	815	890	940	1025	735	805	850	925	865	945	1000	1090	895	980	1040	1130
kW	652	712	752	820	588	644	680	740	692	756	800	872	716	784	832	904
49.3 L9 kVA	905	990	1045	1140	815	895	940	1025	960	1050	1110	1210	1000	1090	1155	1255
kW	724	792	836	912	652	716	752	820	768	840	888	968	800	872	924	1004
49.3 L10 kVA	990	1083	1146	1250	891	975	1031	1125	1049	1148	1215	1325	1089	1192	1260	1375
kW	792	866	917	1000	713	780	825	900	839	918	972	1060	871	954	1008	1100

Efficiencies 400V - 50 Hz (..... P.F.: 1) (— P.F.: 0.8)

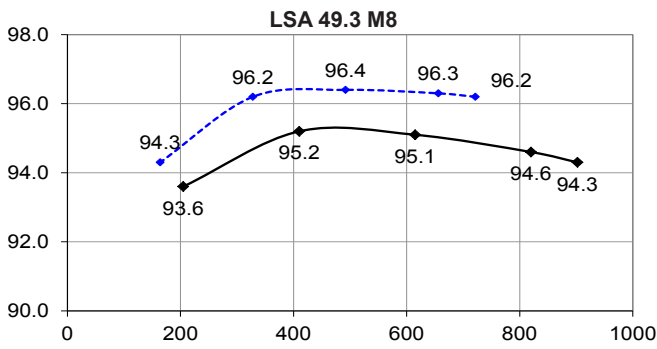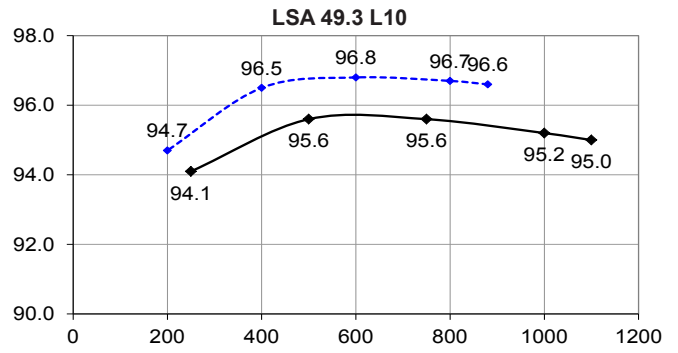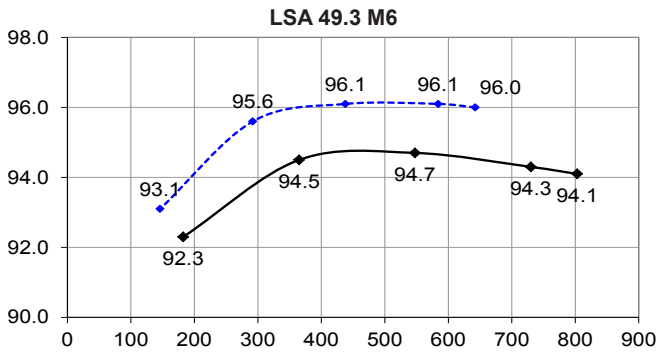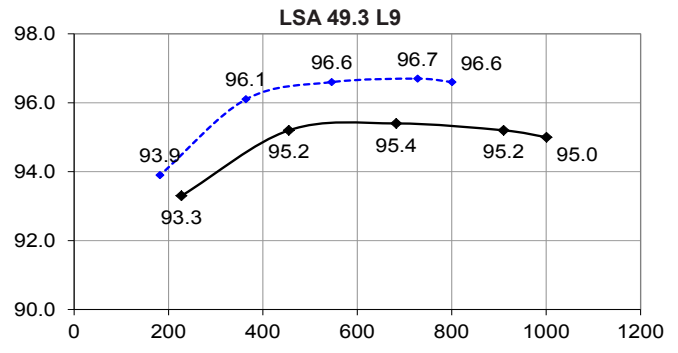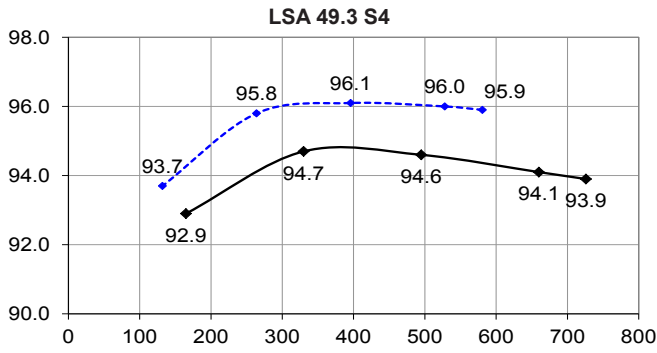


Reactances (%). Time constants (ms) - Class H / 400 V

	S4	M6	M8	L9	L10
Kcc Short-circuit ratio	0.36	0.42	0.34	0.47	0.38
Xd Direct-axis synchro. reactance unsaturated	350	294	348	303	348
Xq Quadrature-axis synchro. reactance unsaturated	210	176	209	182	209
T'do No-load transient time constant	2002	2074	2094	2138	2153
X'd Direct-axis transient reactance saturated	17.5	14.2	16.6	14.1	16.1
T'd Short-circuit transient time constant	100	100	100	100	100
X''d Direct-axis subtransient reactance saturated	14.0	11.3	13.3	11.3	12.9
T''d Subtransient time constant	10	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	16.3	12.8	14.9	12.4	14.1
Xo Zero sequence reactance unsaturated	0.72	0.59	0.69	0.59	0.67
X2 Negative sequence reactance saturated	15.2	12.1	14.1	11.9	13.5
Ta Armature time constant	15	15	15	15	15

Other class H / 400 V data






	S4	M6	M8	L9	L10
io (A) No-load excitation current	1.1	1	1	1	1
ic (A) On-load excitation current	4.2	4.1	3.8	3.7	3.8
uc (V) On-load excitation voltage	57	55	51	49	51
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.)	1560	2050	2050	2600	2600
% Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	13	11	12	11	12
W No-load losses	8233	10288	9226	11189	10343
W Heat dissipation	32519	34995	37082	36425	39772

**Transient voltage variation 400V - 50 Hz
AREP or PMG system**

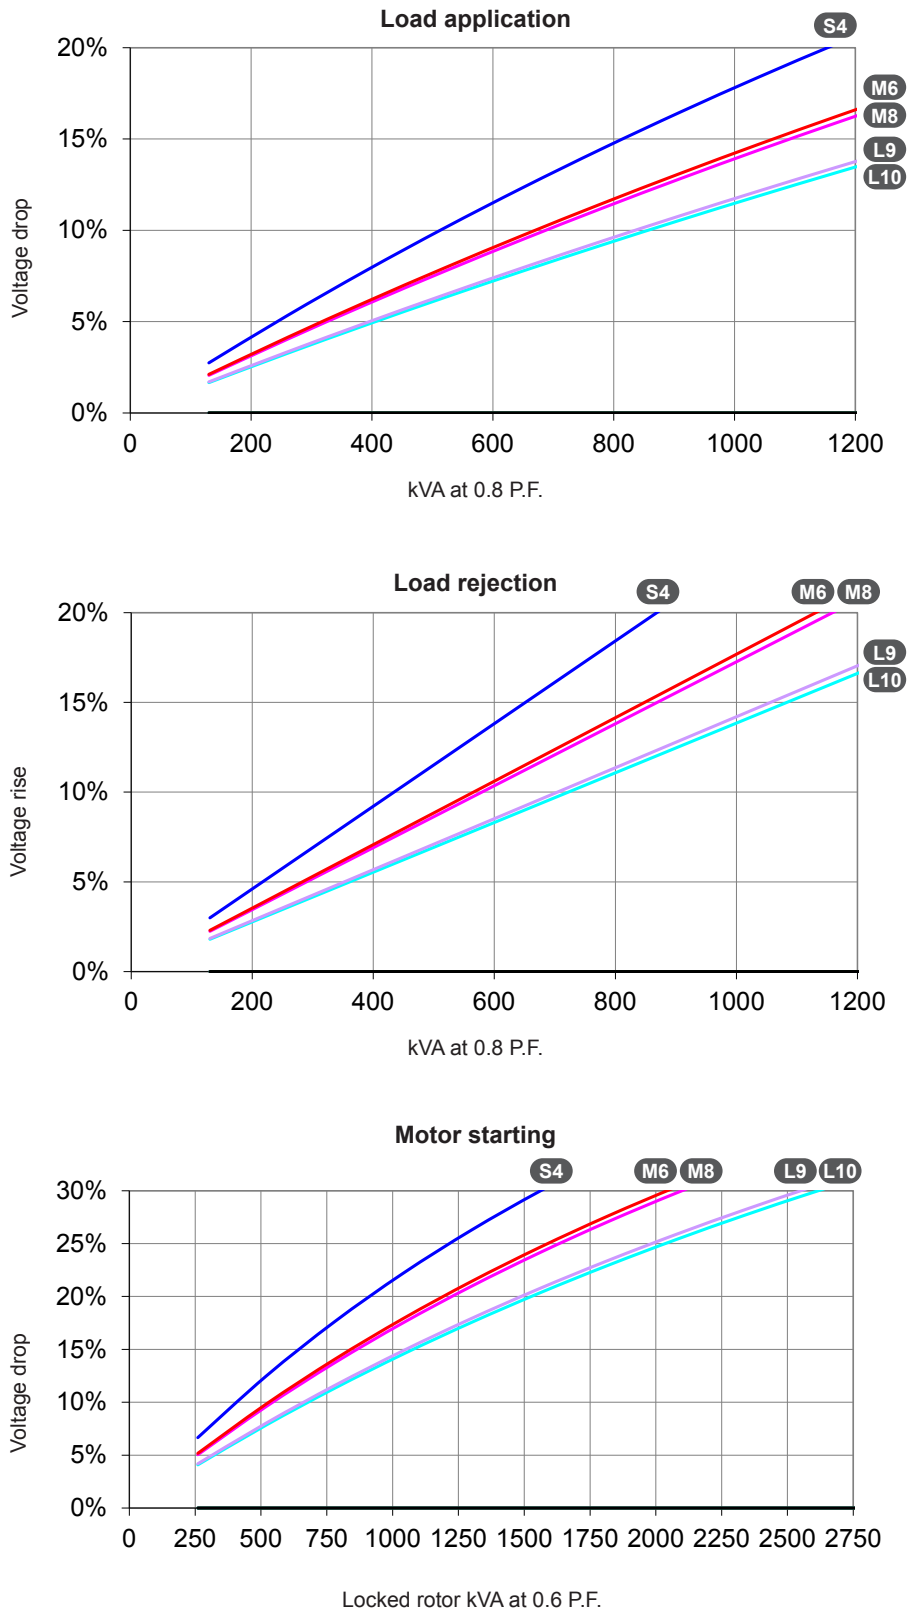

1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
 2) For voltages other than 400V (Y), 230V(Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Efficiencies 480V - 60 Hz (..... P.F.: 1) (— P.F.: 0.8)

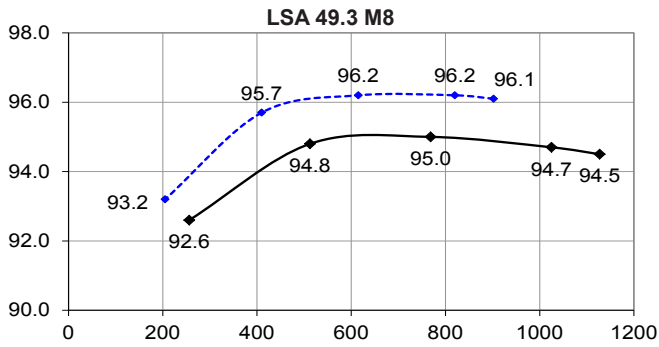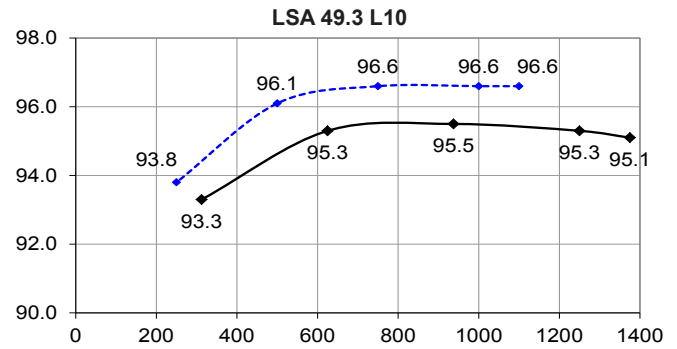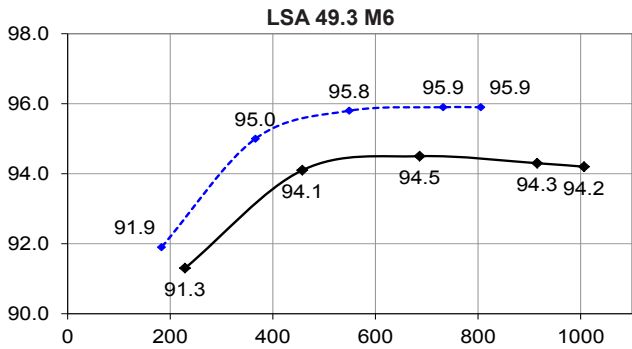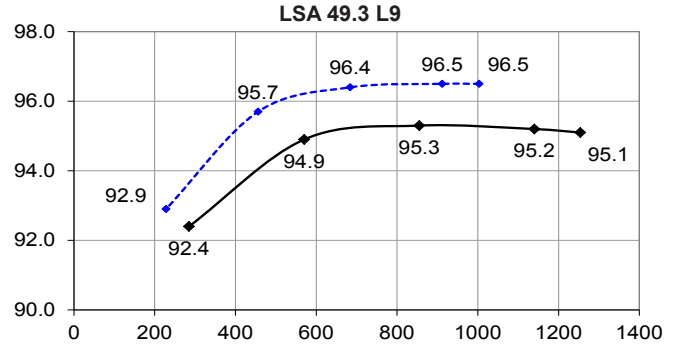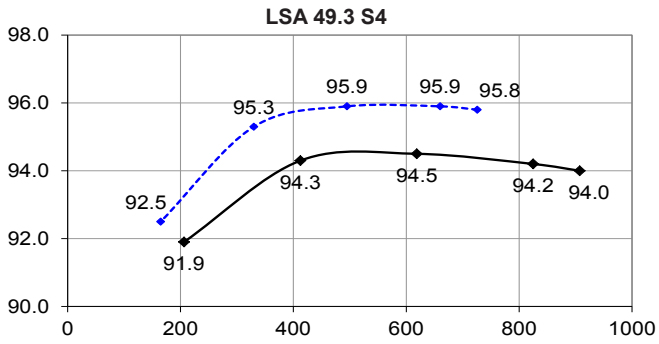




Reactances (%). Time constants (ms) - Class H / 480 V

	S4	M6	M8	L9	L10
Kcc Short-circuit ratio	0.35	0.40	0.32	0.45	0.36
Xd Direct-axis synchro. reactance unsaturated	365	307	362	317	363
Xq Quadrature-axis synchro. reactance unsaturated	219	184	217	190	217
T'do No-load transient time constant	2002	2074	2094	2138	2153
X'd Direct-axis transient reactance saturated	18.2	14.8	17.3	14.8	16.8
T'd Short-circuit transient time constant	100	100	100	100	100
X''d Direct-axis subtransient reactance saturated	14.5	11.8	13.8	11.8	13.4
T''d Subtransient time constant	10	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	17.0	13.4	15.5	13.0	14.7
Xo Zero sequence reactance unsaturated	0.76	0.61	0.72	0.61	0.70
X2 Negative sequence reactance saturated	15.8	12.6	14.7	12.4	14.1
Ta Armature time constant	15	15	15	15	15

Other class H / 480 V data




	S4	M6	M8	L9	L10
io (A) No-load excitation current	1.1	1	1	1	1
ic (A) On-load excitation current	4.3	4.2	3.8	3.8	3.9
uc (V) On-load excitation voltage	67	65	60	58	59
ms Response time (ΔU = 20% transient)	500	500	500	500	500
kVA Start (ΔU = 20% cont. or 30% trans.)	1950	2565	2565	3250	3250
% Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	13	11	12	11	12
W No-load losses	12720	15710	14270	16873	15726
W Heat dissipation	40028	43671	45867	45528	49172

**Transient voltage variation 480V - 60 Hz
AREP or PMG system**

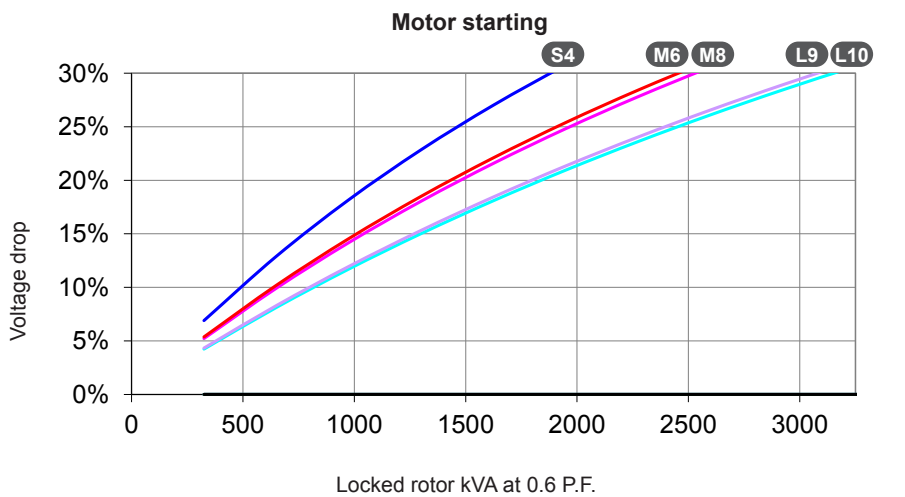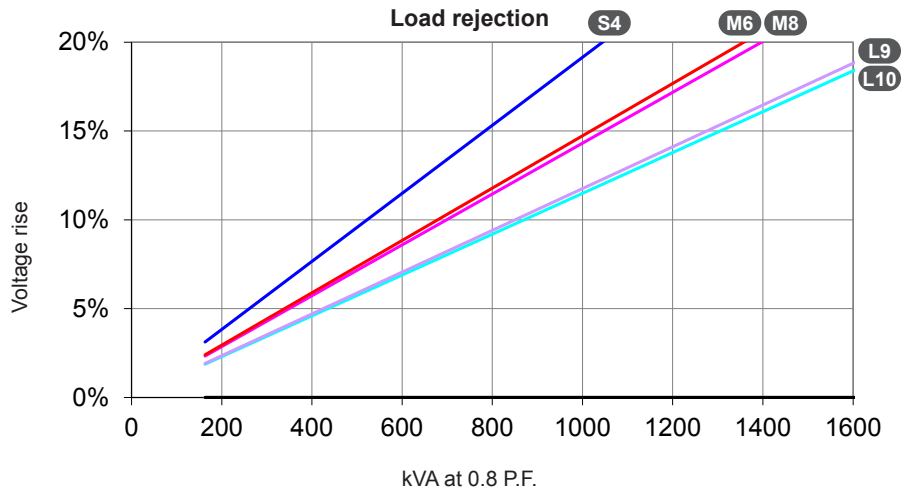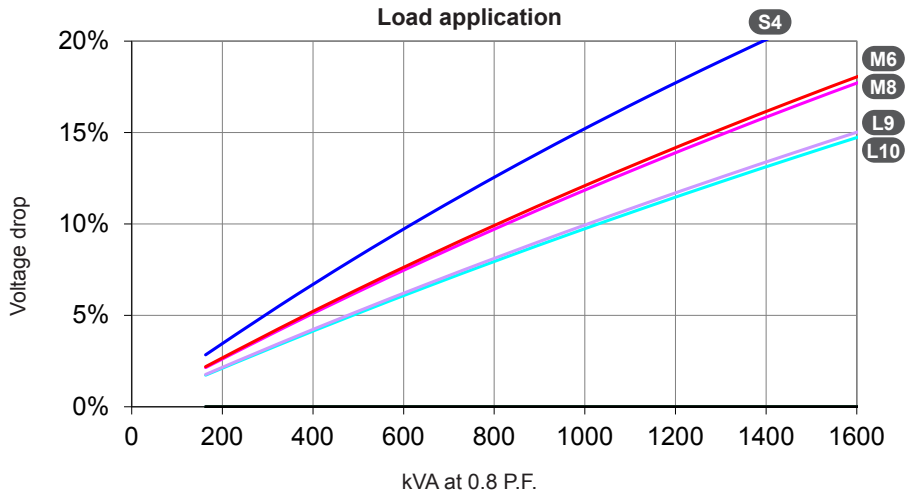

1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
 2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

3-phase short-circuit curves at no load and rated speed (star connection Y)

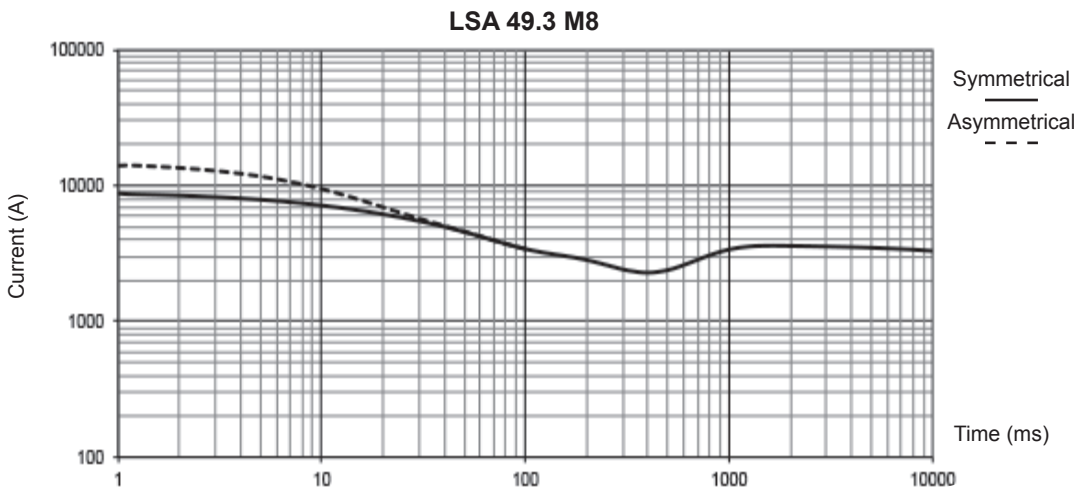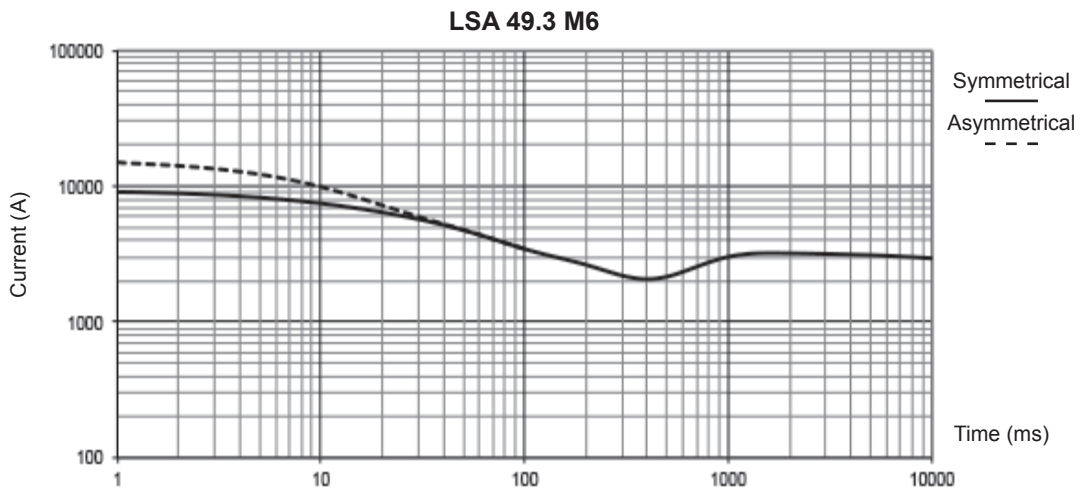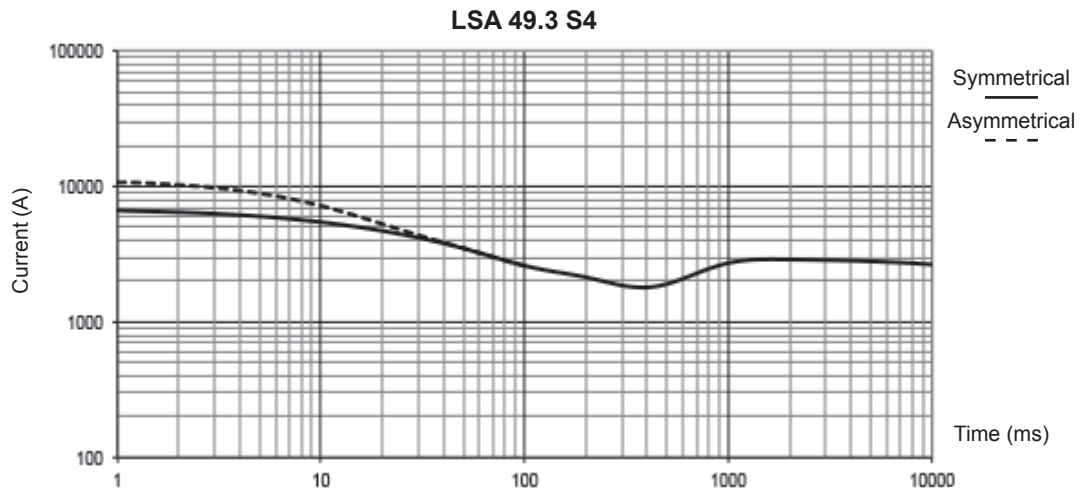



Influence due to connection

Curves shown are for star (Y) connection.

For other connections, use the following multiplication factors:

- Series delta : current value x 1.732
- Parallel star : current value x 2

3-phase short-circuit curves at no load and rated speed (star connection Y)

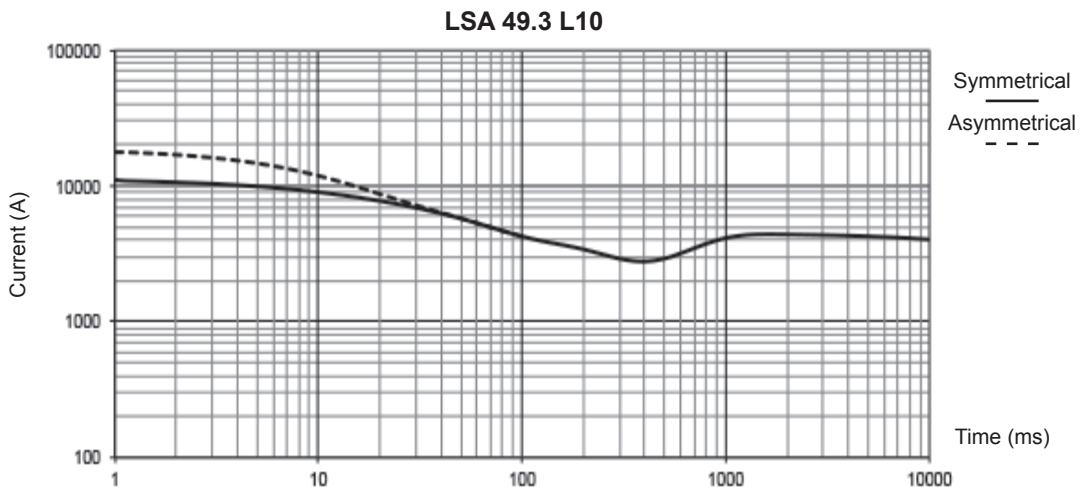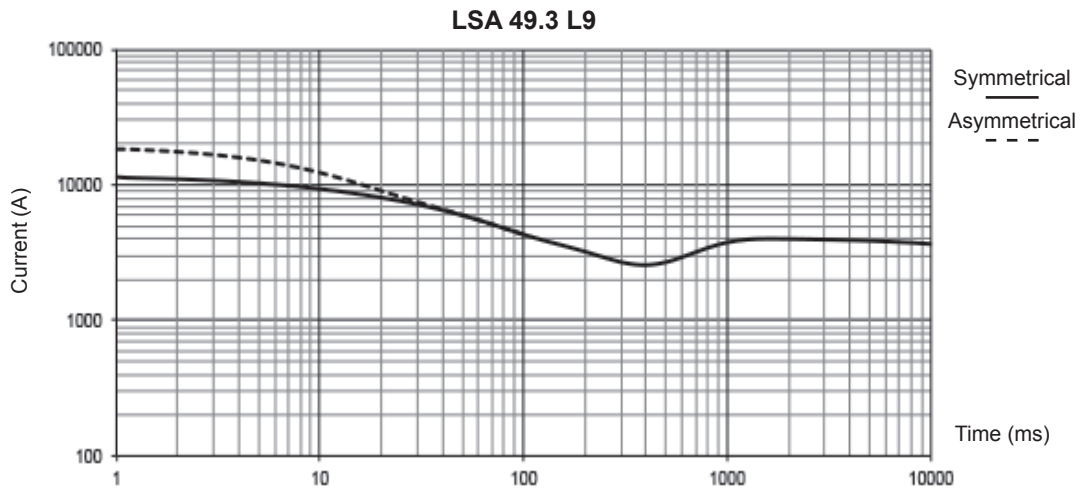


Influence due to short-circuit

Curves are based on a three-phase short-circuit.
For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.


Single bearing dimensions

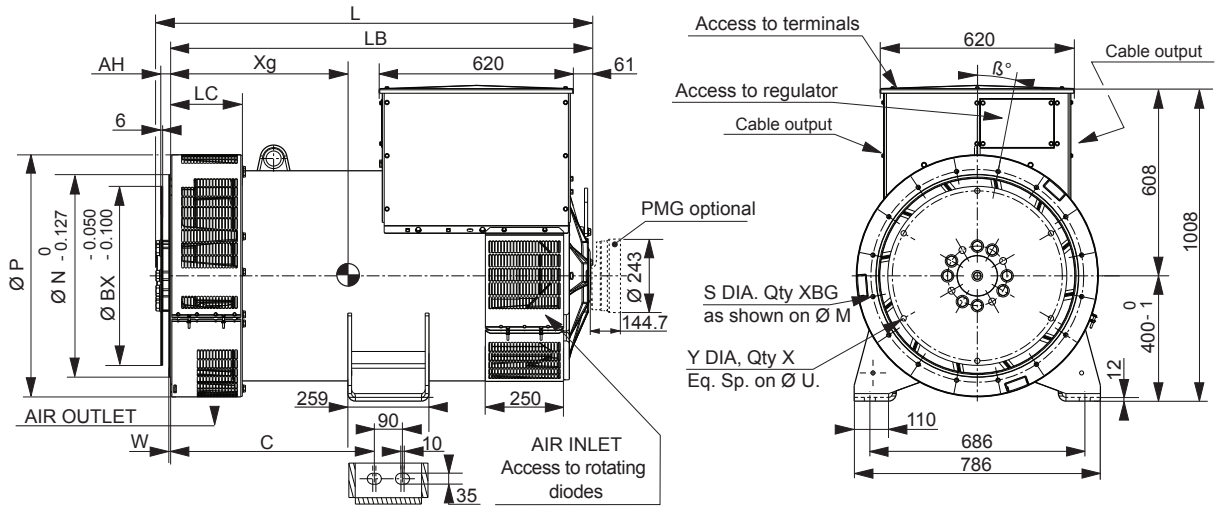

Dimensions (mm) and weight						Coupling		
Type	L without PMG	LB	C	Xg	Weight (kg)	Flex plate	14	18
LSA 49.3 S4	1282	1256.5	560	590	1476	Flange S.A.E 1	X	
LSA 49.3 M6	1372	1346.5	650	629	1623	Flange S.A.E 1/2	X	
LSA 49.3 M8	1372	1346.5	650	636	1685	Flange S.A.E 0	X	X
LSA 49.3 L9	1462	1436.5	650	673	1837	Flange S.A.E 00		X
LSA 49.3 L10	1462	1436.5	650	681	1886			

Flange (mm)									Flex plate (mm)					
S.A.E.	P	N	M	LC	XBG	S	W	β°	S.A.E.	BX	U	X	Y	AH
1	773	511.175	530.225	228.5	12	12	6	15°	14	466.7	438.15	8	14	25.4
1/2	773	584.2	619.125	228.5	12	14	6	15°	18	571.5	542.92	6	17	15.7
0	773	647.7	679.45	228.5	16	14	6	11° 15'						
00	883	787.4	850.9	245	16	14	7	11° 15'						


Torsional analysis data

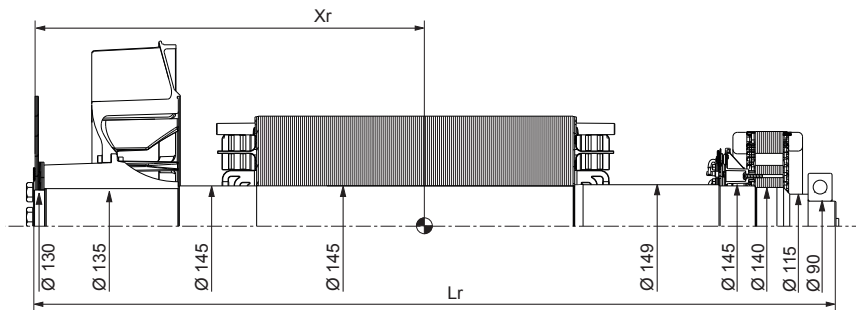

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)								
Flange	S.A.E. 14				S.A.E. 18			
	Xr	Lr	M	J	Xr	Lr	M	J
LSA 49.3 S4	584	1255	539	8.51	572	1255	541	8.77
LSA 49.3 M6	626	1345	602	9.61	614	1345	604	9.87
LSA 49.3 M8	634	1345	628	10.16	622	1345	630	10.42
LSA 49.3 L9	671	1435	684	11.12	659	1435	686	11.38
LSA 49.3 L10	681	1435	701	11.48	669	1435	703	11.74


NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Leroy-Somer site, 3D drawing files are available upon request. The torsional analysis of the transmission is imperative. All values are available upon request.

Two bearing dimensions

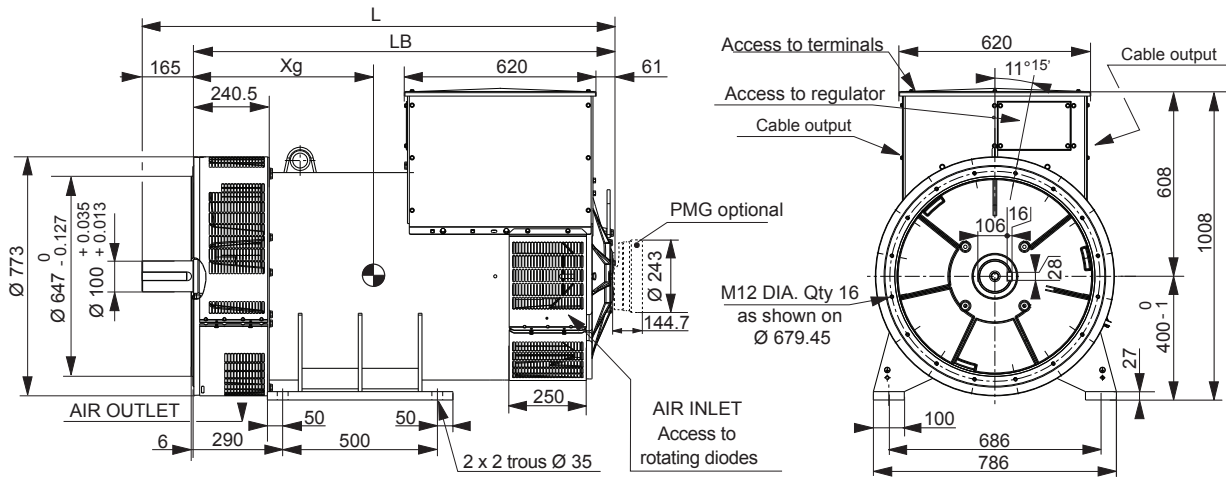

Dimensions (mm) and weight				
Type	L without PMG	LB	Xg	Weight (kg)
LSA 49.3 S4	1439.5	1274.5	596	1480
LSA 49.3 M6	1529.5	1364.5	636	1622
LSA 49.3 M8	1529.5	1364.5	643	1683
LSA 49.3 L9	1619.5	1454.5	682	1835
LSA 49.3 L10	1619.5	1454.5	688	1884

Torsional analysis data

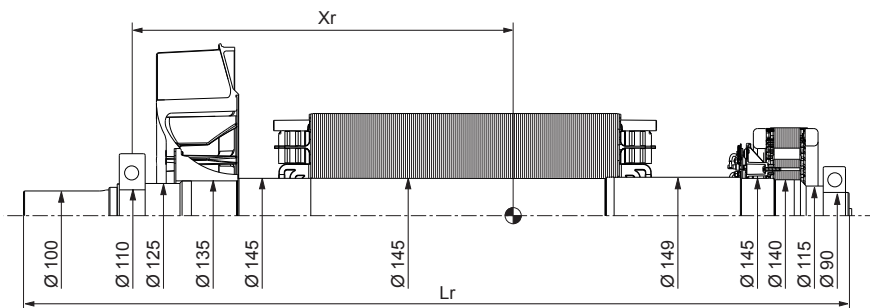

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)				
Type	Xr	Lr	M	J
LSA 49.3 S4	545	1409	512	8.07
LSA 49.3 M6	584	1499	574	9.18
LSA 49.3 M8	590	1499	600	9.73
LSA 49.3 L9	627	1589	656	10.69
LSA 49.3 L10	634	1589	673	11.05

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Leroy-Somer site, 3D drawing files are available upon request. The torsional analysis of the transmission is imperative. All values are available upon request.

LEROY-SOMER[™]

www.leroy-somer.com/epg

[Linkedin.com/company/Leroy-Somer](https://www.linkedin.com/company/Leroy-Somer)
[Twitter.com/Leroy_Somer_en](https://twitter.com/Leroy_Somer_en)
[Facebook.com/LeroySomer.Nidec.en](https://www.facebook.com/LeroySomer.Nidec.en)
[YouTube.com/LeroySomerOfficiel](https://www.youtube.com/LeroySomerOfficiel)



Nidec
All for dreams

© Nidec 2018. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Siège : Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France.
Capital social : 65 800 512 €, RCS Angoulême 338 567 258.