


DSE4110 DIAGRAM.

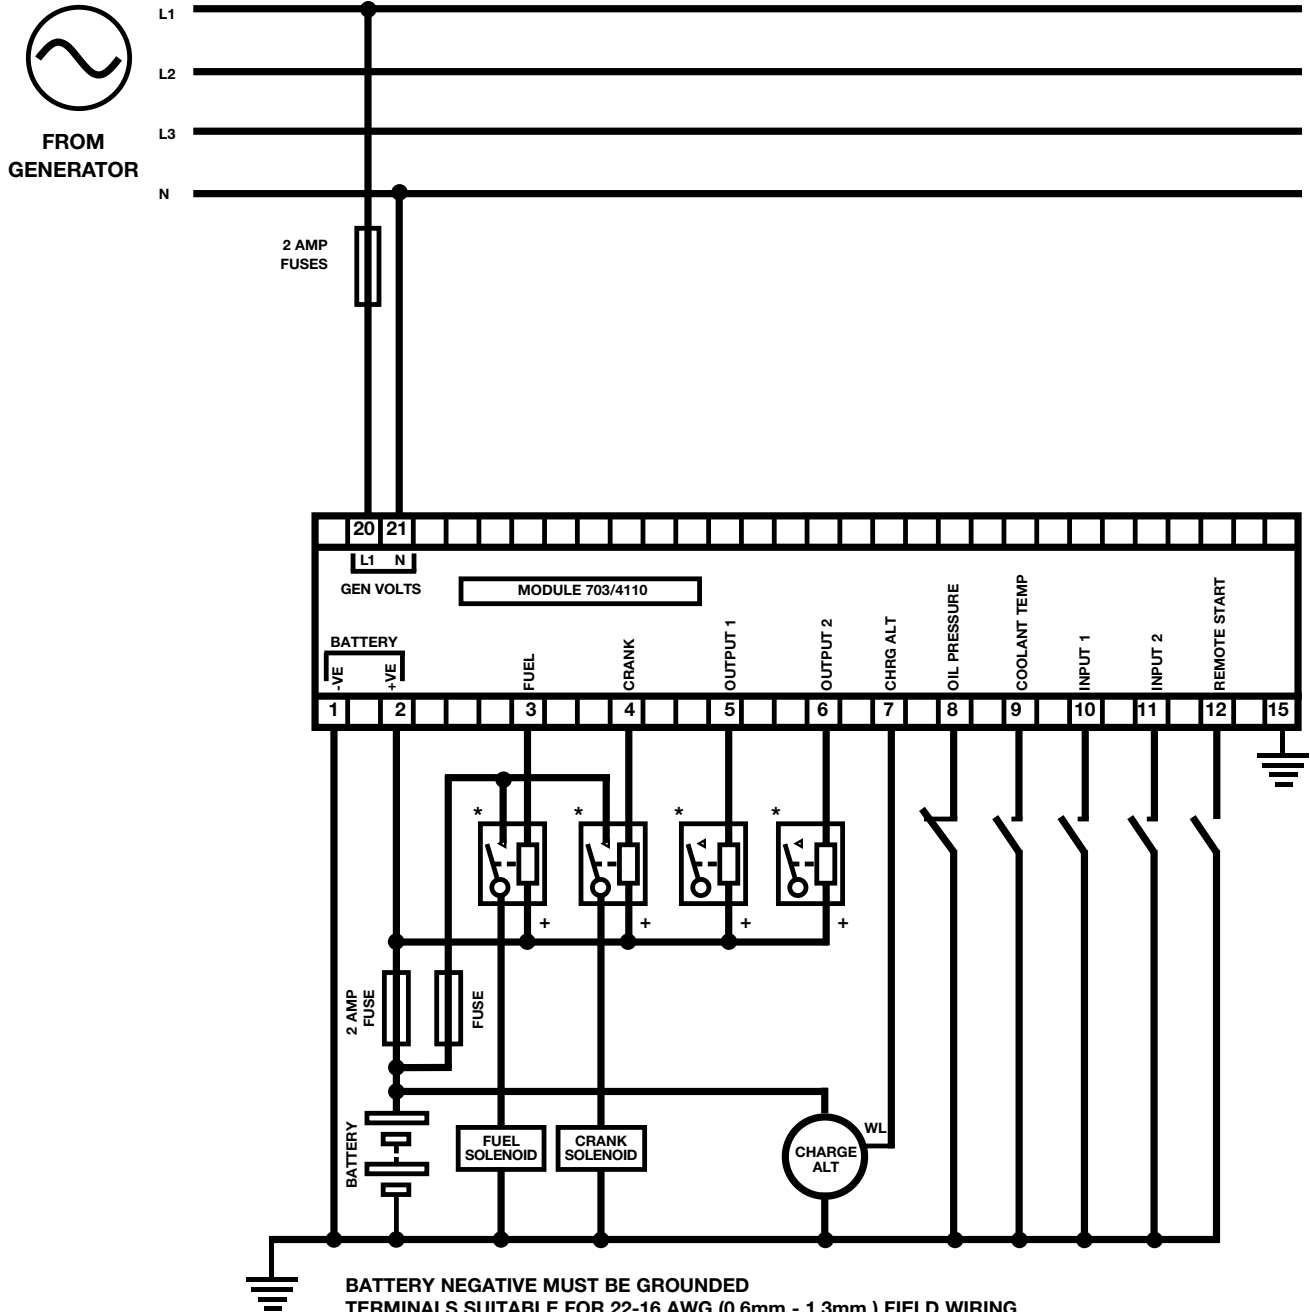

BATTERY NEGATIVE MUST BE GROUNDED
 TERMINALS SUITABLE FOR 22-16 AWG (0.6mm - 1.3mm) FIELD WIRING
 TIGHTENING TORQUE = 0.8Nm (7lb-in)

* NOTE. ALL THE OUTPUTS ARE SOLID STATE AND ARE NEGATIVE SWITCHING

WEBSITE

www.deepseapl.com

CALL US TODAY
 1-888-POWER-58

REQUEST A QUOTE
 parts@genpowerusa.com

SHOP ONLINE
 www.genpowerusa.com