


LVI634G
Winding 312 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	1091	1146	1146	1040	1190	1250	1250	1135	1225	1288	1288	1170	1250	1313	1313	1190
	kW	873	917	917	832	952	1000	1000	908	980	1030	1030	936	1000	1050	1050	952
	Efficiency (%)	95.1	95.1	95.1	95.3	94.9	94.9	95.0	95.2	94.8	94.8	94.9	95.2	94.7	94.7	94.8	95.2
	kW Input	918	964	964	873	1003	1054	1053	954	1034	1087	1086	983	1056	1109	1108	1000

60 Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	1200	1270	1328	1386	1310	1386	1449	1513	1354	1432	1497	1563	1369	1448	1514	1580
	kW	960	1016	1062	1109	1048	1109	1159	1210	1083	1146	1198	1250	1095	1158	1211	1264
	Efficiency (%)	95.1	95.1	95.1	95.1	94.9	94.9	95.0	95.0	94.8	94.9	94.9	94.9	94.8	94.8	94.9	94.9
	kW Input	1009	1068	1117	1166	1104	1168	1220	1274	1143	1207	1262	1318	1155	1222	1276	1332

DIMENSIONS

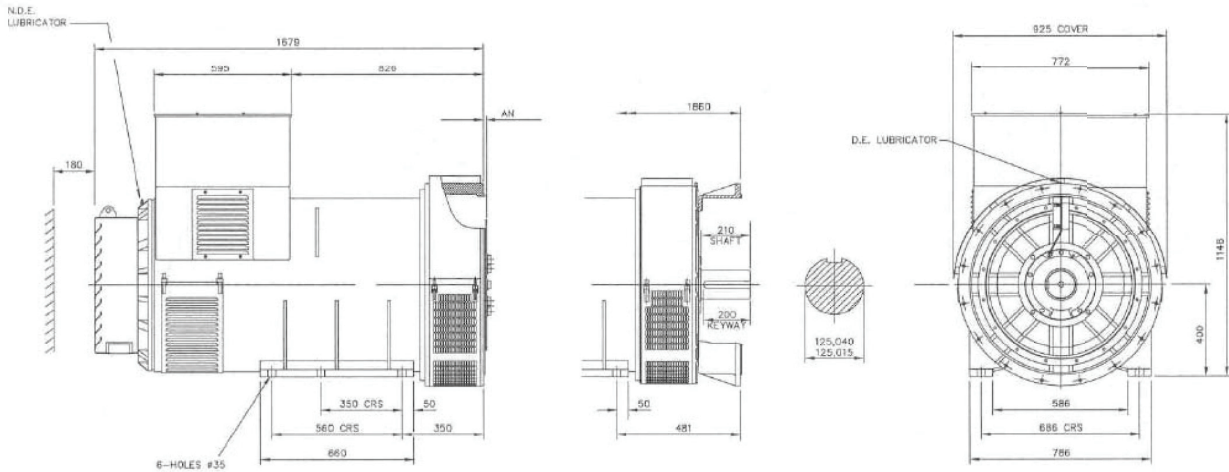

COUPLING DISC	AN
SAE 18	15,67
SAE 21	0
SAE 24	0

STAMFORD

Head Office Address:
Barnack Road, Stamford
Lincolnshire, PE9 2NB
United Kingdom
Tel: +44 (0) 1780 484000
Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

TD_LVI634G.GB_08.02_01_GB