


60Hz

## RATINGS

| Class - Temp Rise | Cont. F - 105/40°C<br>0.8pf |      |      | Cont. H - 125/40°C<br>0.8pf |      |      | Standby - 150/40°C<br>0.8pf |      |      | Standby - 163/27°C<br>0.8pf |      |      |
|-------------------|-----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|
| Series (V)        | 220                         | 230  | 240  | 220                         | 230  | 240  | 220                         | 230  | 240  | 220                         | 230  | 240  |
| Parallel (V)      | 110                         | 115  | 120  | 110                         | 115  | 120  | 110                         | 115  | 120  | 110                         | 115  | 120  |
| kVA               | 7.0                         | 7.3  | 7.6  | 7.7                         | 8.0  | 8.4  | 8.3                         | 8.7  | 9.0  | 8.5                         | 8.8  | 9.2  |
| kW                | 5.6                         | 5.8  | 6.1  | 6.2                         | 6.4  | 6.7  | 6.6                         | 7.0  | 7.2  | 6.8                         | 7.0  | 7.4  |
| Efficiency (%)    | 68.1                        | 68.4 | 68.6 | 68.0                        | 68.3 | 68.5 | 67.8                        | 68.1 | 68.3 | 67.7                        | 68.0 | 68.3 |
| kW Input          | 8.2                         | 8.5  | 8.9  | 9.1                         | 9.4  | 9.8  | 9.7                         | 10.3 | 10.5 | 10.0                        | 10.3 | 10.8 |

| Class - Temp Rise | Cont. F - 105/40°C<br>1.0pf |      |      | Cont. H - 125/40°C<br>1.0pf |      |      | Standby - 150/40°C<br>1.0pf |      |      | Standby - 163/27°C<br>1.0pf |      |      |
|-------------------|-----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|
| Series (V)        | 220                         | 230  | 240  | 220                         | 230  | 240  | 220                         | 230  | 240  | 220                         | 230  | 240  |
| Parallel (V)      | 110                         | 115  | 120  | 110                         | 115  | 120  | 110                         | 115  | 120  | 110                         | 115  | 120  |
| kVA               | 9.1                         | 9.1  | 9.1  | 10.0                        | 10.0 | 10.0 | 10.8                        | 10.8 | 10.8 | 11.0                        | 11.0 | 11.0 |
| kW                | 9.1                         | 9.1  | 9.1  | 10.0                        | 10.0 | 10.0 | 10.8                        | 10.8 | 10.8 | 11.0                        | 11.0 | 11.0 |
| Efficiency (%)    | 73.4                        | 74.0 | 74.4 | 72.9                        | 73.5 | 74.0 | 72.4                        | 73.1 | 73.7 | 72.3                        | 73.0 | 73.6 |
| kW Input          | 12.4                        | 12.3 | 12.2 | 13.7                        | 13.6 | 13.5 | 14.9                        | 14.8 | 14.7 | 15.2                        | 15.1 | 14.9 |

## DIMENSIONS

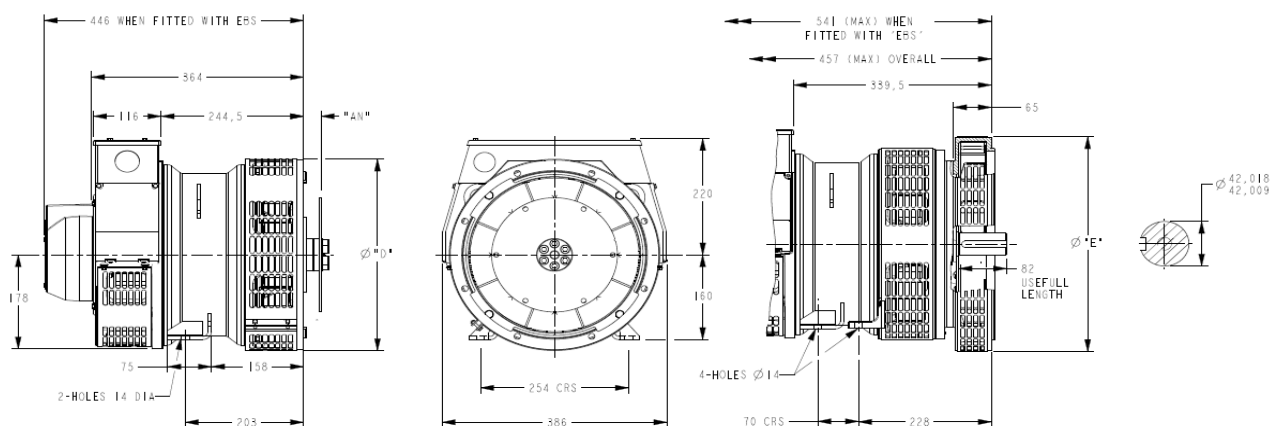

| COUPLING DISC |      |
|---------------|------|
| SAE           | "AN" |
| 6.5           | 30.2 |
| 7.5           | 30.2 |
| 8             | 62   |
| 10            | 53.8 |
| 11.5          | 39.6 |

| 1-BRG APAPTOR |       |
|---------------|-------|
| SAE           | Ø "D" |
| 5             | 361   |
| 4             | 405   |
| 3             | 451   |
| 2             | 489   |

8-HOLES SPACED AS 12  
8-HOLES SPACED AS 12

| 2-BRG APAPTOR |       |
|---------------|-------|
| SAE           | Ø "E" |
| 5             | 359   |
| 4             | 406   |
| 3             | 455   |
| 2             | 493   |