

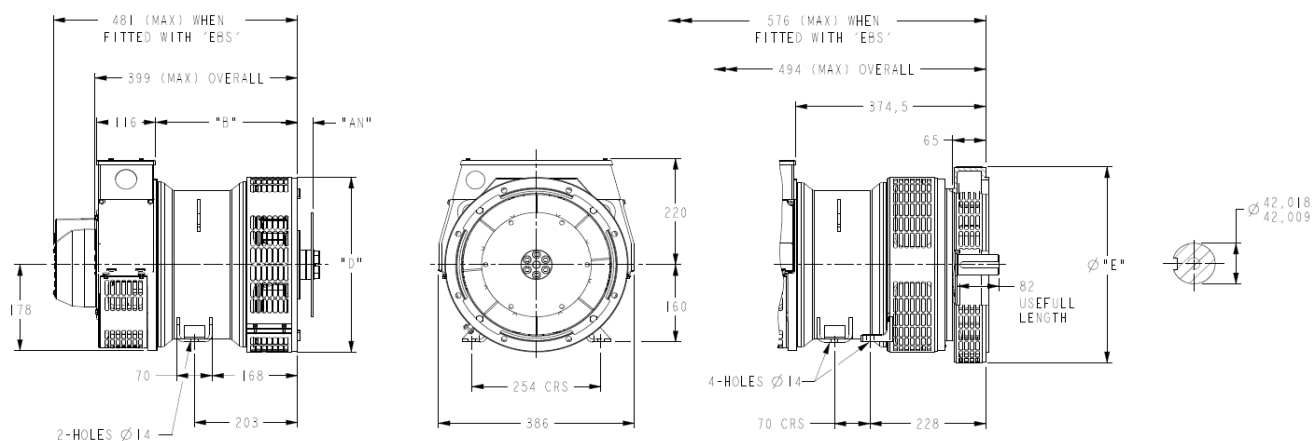
PI044G

Winding 06

STAMFORD**60Hz****RATINGS**

Class - Temp Rise	Cont. F - 105/40°C 0.8pf			Cont. H - 125/40°C 0.8pf			Standby - 150/40°C 0.8pf			Standby - 163/27°C 0.8pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	10.6	11.0	11.5	11.6	12.1	12.6	12.5	13.0	13.6	12.7	13.3	13.8
kW	8.5	8.8	9.2	9.3	9.7	10.1	10.0	10.4	10.9	10.2	10.6	11.0
Efficiency (%)	75.1	75.3	75.5	75.0	75.2	75.4	74.8	75.0	75.2	74.7	75.0	75.2
kW Input	11.3	11.7	12.2	12.4	12.9	13.4	13.4	13.9	14.5	13.7	14.1	14.6

Class - Temp Rise	Cont. F - 105/40°C 1.0pf			Cont. H - 125/40°C 1.0pf			Standby - 150/40°C 1.0pf			Standby - 163/27°C 1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	13.6	13.6	13.6	15.0	15.0	15.0	16.2	16.2	16.2	16.5	16.5	16.5
kW	13.6	13.6	13.6	15.0	15.0	15.0	16.2	16.2	16.2	16.5	16.5	16.5
Efficiency (%)	79.4	79.9	80.2	78.9	79.5	79.9	78.5	79.1	79.6	78.4	79.0	79.5
kW Input	17.1	17.0	17.0	19.0	18.9	18.8	20.6	20.5	20.4	21.0	20.9	20.8

DIMENSIONS

COUPLING DISC	
SAE	"AN"
6.5	30.2
7.5	30.2
8	62
10	53.8
11.5	39.6

1-BRG ADAPTORS	
SAE	"D"
5	361
4	405
3	451
2	489

8-HOLES SPACED AS 12
8-HOLES SPACED AS 12

2-BRG ADAPTORS	
SAE	Ø "E"
5	359
4	406
3	455
2	493