

PI734G

Winding 312 / 0.8 Power Factor


STAMFORD

RATINGS

Class - Temp Rise	Cont. F - 105/40°C	Cont. H - 125/40°C	Standby - 150/40°C	Standby - 163/27°C
50Hz Star (V)	380 400 415 440	380 400 415 440	380 400 415 440	380 400 415 440
kVA	1985 2050 2050 2005	2135 2200 2200 2160	2225 2295 2295 2250	2290 2360 2360 2310
kW	1588 1640 1640 1604	1708 1760 1760 1728	1780 1836 1836 1800	1832 1888 1888 1848
Efficiency (%)	96.1 96.2 96.3 96.4	96.0 96.0 96.1 96.3	95.9 95.9 96.0 96.2	95.8 95.9 96.0 96.1
kW Input	1652 1705 1703 1664	1779 1833 1831 1794	1856 1914 1913 1871	1912 1969 1967 1923

60Hz Star (V)	416 440 460 480	416 440 460 480	416 440 460 480	416 440 460 480
kVA	2255 2360 2445 2560	2420 2535 2625 2750	2515 2635 2725 2860	2590 2715 2810 2945
kW	1804 1888 1956 2048	1936 2028 2100 2200	2012 2108 2180 2288	2072 2172 2248 2356
Efficiency (%)	96.0 96.1 96.2 96.2	95.9 96.0 96.1 96.1	95.8 95.9 96.0 96.0	95.8 95.9 95.9 95.9
kW Input	1879 1965 2033 2129	2019 2113 2185 2289	2100 2198 2271 2383	2163 2265 2344 2457

DIMENSIONS

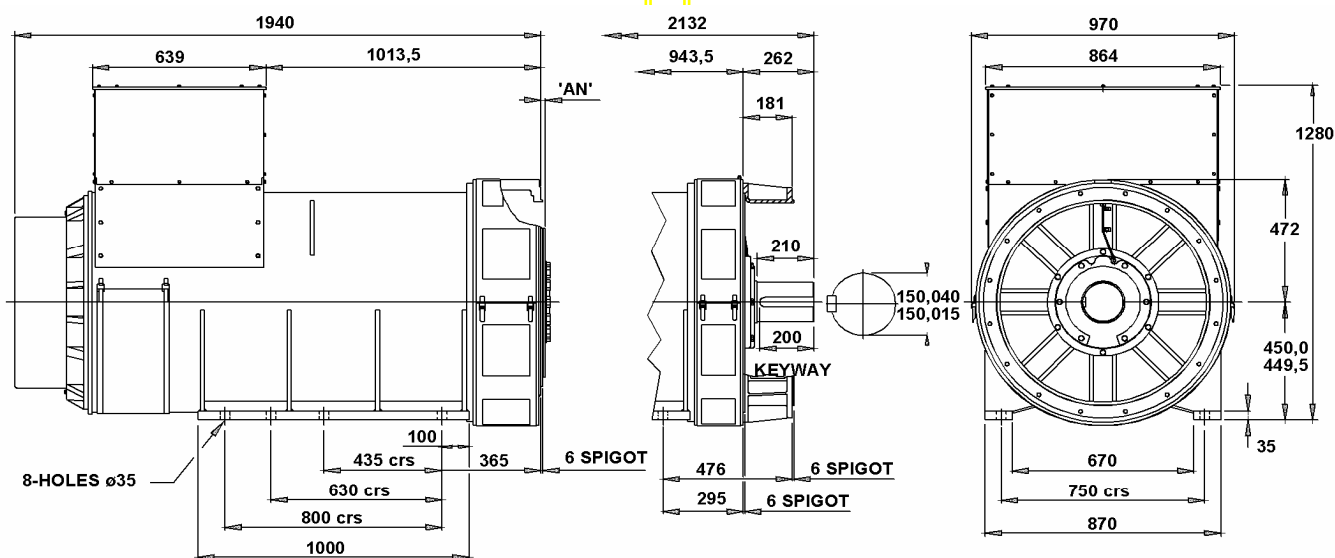

COUPLING DISC	'AN'
S.A.E No 21	0
S.A.E No 24	0

1-BRG ADAPTORS
S.A.E No 0
S.A.E No 00

2-BRG ADAPTORS
S.A.E No 0
S.A.E No 00