

UCI224C

Winding 06


STAMFORD

60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C 0.8pf			Cont. H - 125/40°C 0.8pf			Cont. F - 105/40°C 1.0pf			Cont. H - 125/40°C 1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	33.8	33.8	33.8	37.5	37.5	37.5	33.8	33.8	33.8	37.5	37.5	37.5
kW	27.0	27.0	27.0	30.0	30.0	30.0	33.8	33.8	33.8	37.5	37.5	37.5
Efficiency (%)	76.9	77.8	78.4	76.0	76.9	77.6	81.3	82.0	82.6	80.4	81.2	81.9
kW Input	35.2	34.8	34.5	39.5	39.0	38.7	41.6	41.2	40.9	46.6	46.2	45.8

APPROVE
DIMENSIONS

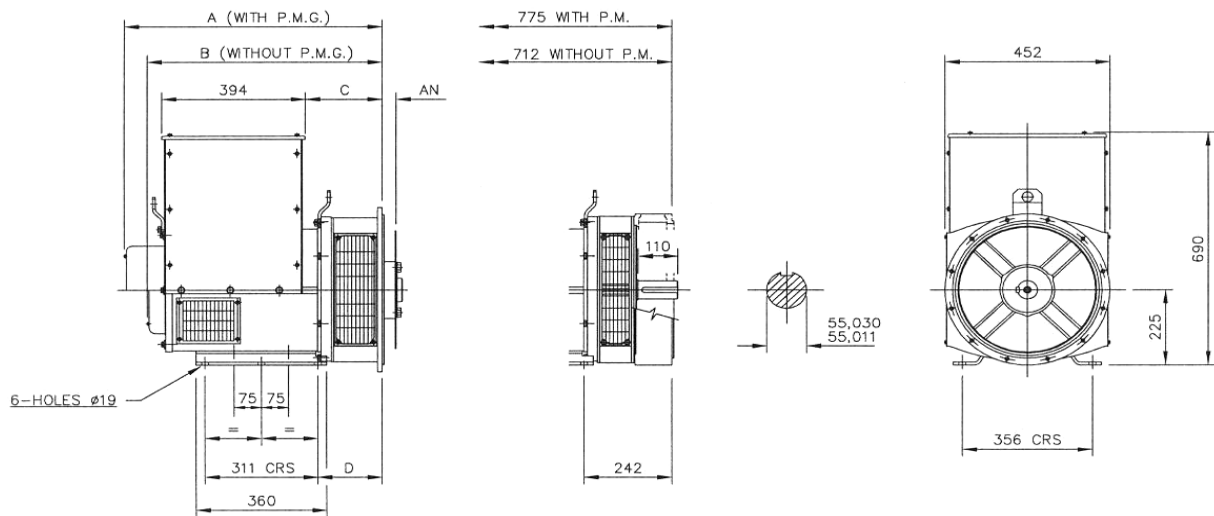

SINGLE BEARING MACHINES ONLY						
ADAPTOR	A	B	C	D	COUPLING DISCS	AN
SAE 1	724,3	661,3	224,3	191,3	SAE 8	61,90
SAE 2	710	647	210	177	SAE 10	53,98
SAE 3	710	647	210	177	SAE 11,5	39,68
SAE 4	710	647	210	177	SAE 14	25,40