

UCI224E
Winding 06

STAMFORD


60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C			Cont. H - 125/40°C			Cont. F - 105/40°C			Cont. H - 125/40°C		
	0.8pf			0.8pf			1.0pf			1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	47.3	47.3	47.3	50.0	50.0	50.0	47.3	47.3	47.3	50.0	50.0	50.0
kW	37.8	37.8	37.8	40.0	40.0	40.0	47.3	47.3	47.3	50.0	50.0	50.0
Efficiency (%)	80.5	81.1	81.6	80.1	80.8	81.3	84.4	84.9	85.4	84.0	84.6	85.1
kW Input	47.0	46.7	46.4	49.9	49.5	49.2	56.0	55.7	55.4	59.5	59.1	58.8

APPROVED

DIMENSIONS

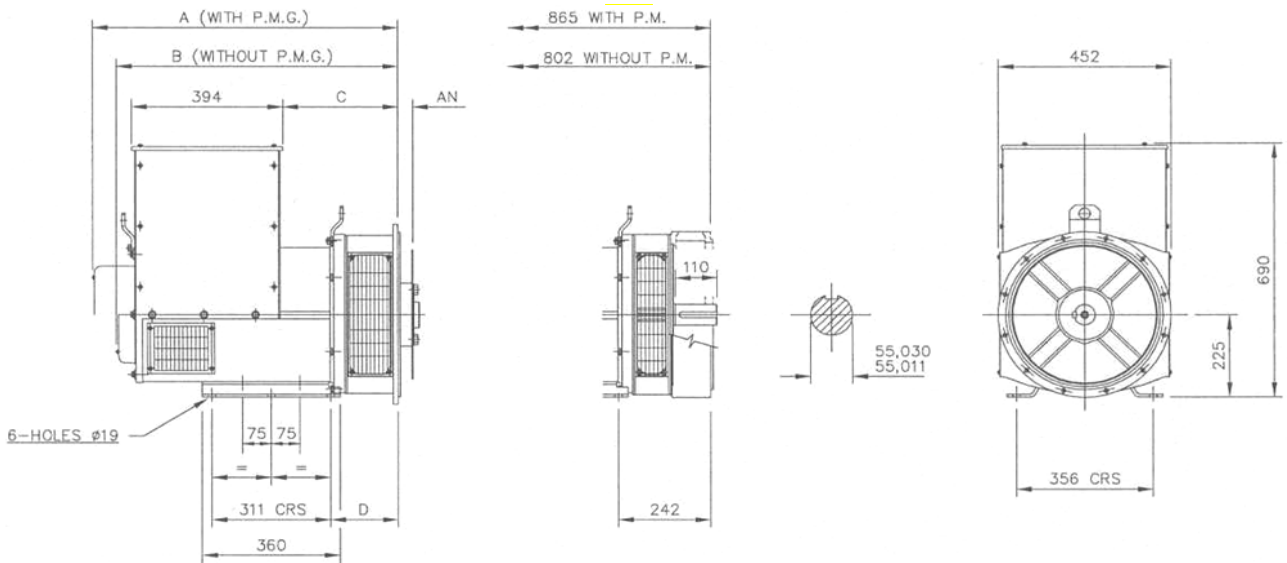

SINGLE BEARING MACHINES ONLY						
ADAPTOR	A	B	C	D	COUPLING DISCS	AN
SAE 1	814,3	751,3	314,3	191,3	SAE 8	61,90
SAE 2	800	737	300	177	SAE 10	53,98
SAE 3	800	737	300	177	SAE 11,5	39,68
SAE 4	800	737	300	177	SAE 14	25,40