

UCI224G
Winding 06




60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C 0.8pf			Cont. H - 125/40°C 0.8pf			Cont. F - 105/40°C 1.0pf			Cont. H - 125/40°C 1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	65.6	65.6	65.6	70.0	70.0	70.0	65.6	65.6	65.6	75.0	75.0	75.0
kW	52.5	52.5	52.5	56.0	56.0	56.0	65.6	65.6	65.6	75.0	75.0	75.0
Efficiency (%)	84.1	84.6	84.9	83.7	84.2	84.7	87.4	87.8	88.2	86.7	87.2	87.6
kW Input	62.4	62.1	61.8	66.9	66.5	66.1	75.1	74.7	74.4	86.5	86.0	85.6

DIMENSIONS

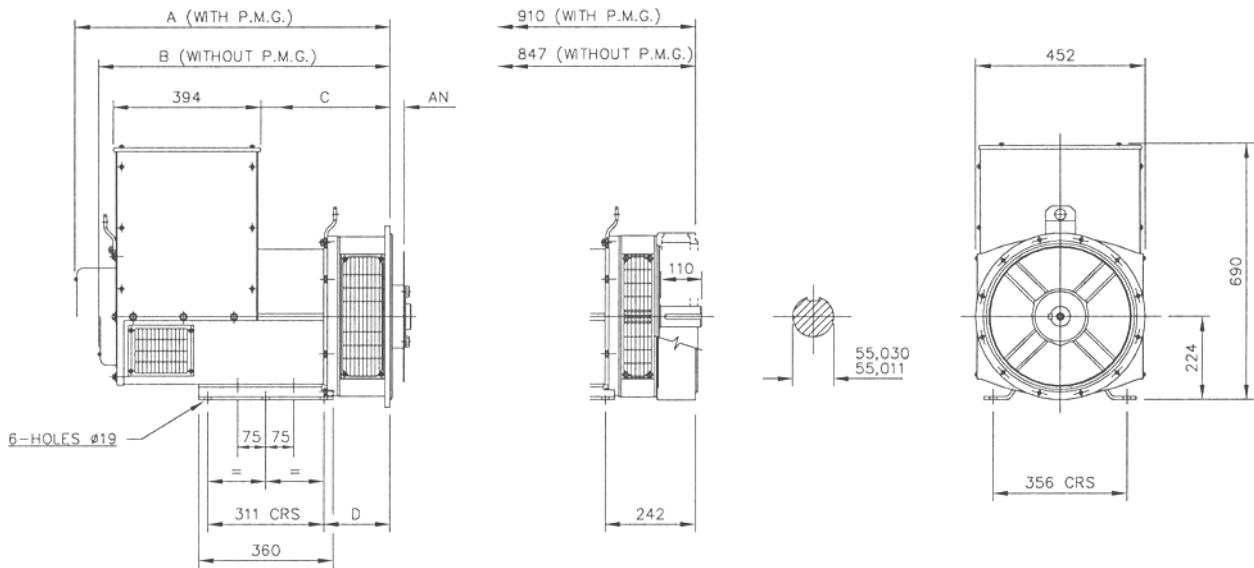

SINGLE BEARING ADAPTORS				
ADAPTOR	A	B	C	D
SAE 1	859,3	796,3	359,3	191,3
SAE 2	845	782	345	177
SAE 3	845	782	345	177
SAE 4	845	782	345	177

COUPLING DISCS	
DISC	AN
SAE 8	61,90
SAE 10	53,98
SAE 11,5	39,68
SAE 14	25,40