

UCI274C
Winding 06


STAMFORD

60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C 0.8pf			Cont. H - 125/40°C 0.8pf			Cont. F - 105/40°C 1.0pf			Cont. H - 125/40°C 1.0pf		
	Series (V)	220	230	240	220	230	240	220	230	240	220	230
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	75.0	75.0	75.0	84.0	84.0	84.0	75.0	75.0	75.0	90.0	90.0	90.0
kW	60.0	60.0	60.0	67.2	67.2	67.2	75.0	75.0	75.0	90.0	90.0	90.0
Efficiency (%)	81.1	81.7	82.2	80.2	80.9	81.5	84.9	85.4	85.9	83.6	84.3	84.9
kW Input	74.0	73.5	73.0	83.7	83.0	82.4	88.3	87.8	87.3	107.7	106.8	106.0

APPROVED
DIMENSIONS

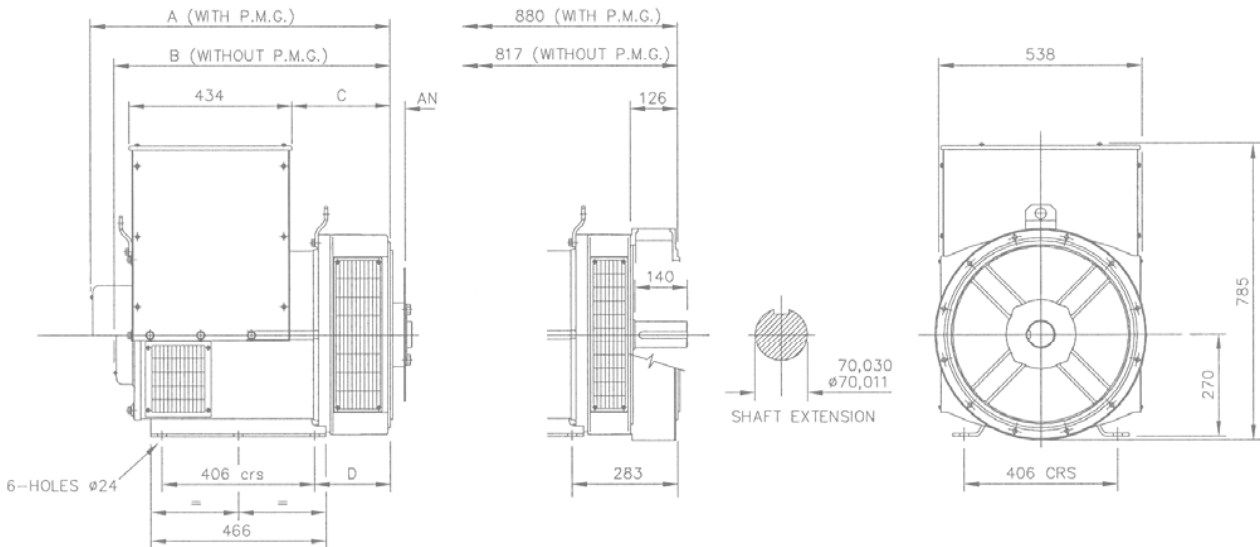

SINGLE BEARING ADAPTORS				
ADAPTOR	A	B	C	D
SAE 1	813,3	750,3	274,3	216,3
SAE 2	799	736	260	202
SAE 3	799	736	260	202

COUPLING DISCS	
DISC	AN
SAE 10	53,98
SAE 11,5	39,68
SAE 14	25,40