

UCI274E
Winding 06


STAMFORD

60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C			Cont. H - 125/40°C			Cont. F - 105/40°C			Cont. H - 125/40°C		
	0.8pf			0.8pf			1.0pf			1.0pf		
Series (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	100.0	100.0	100.0	112.0	112.0	112.0	100.0	100.0	100.0	115.0	115.0	115.0
kW	80.0	80.0	80.0	89.6	89.6	89.6	100.0	100.0	100.0	115.0	115.0	115.0
Efficiency (%)	84.4	84.8	85.1	83.8	84.3	84.7	87.7	88.1	88.4	87.0	87.5	87.9
kW Input	94.8	94.3	94.0	106.9	106.3	105.8	114.0	113.5	113.1	132.2	131.4	130.8

APPROVE
DIMENSIONS

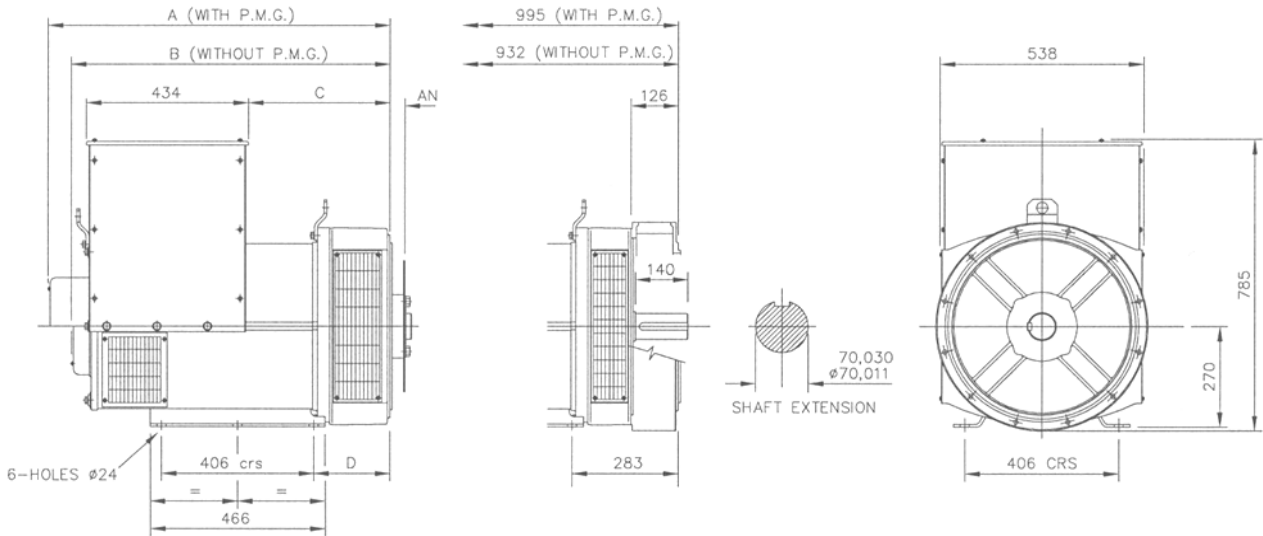

SINGLE BEARING ADAPTORS				
ADAPTOR	A	B	C	D
SAE 1	928,3	865,3	389,3	216,3
SAE 2	914	851	375	202
SAE 3	914	851	375	202

COUPLING DISCS	
DISC	AN
SAE 10	53,98
SAE 11,5	39,68
SAE 14	25,40