


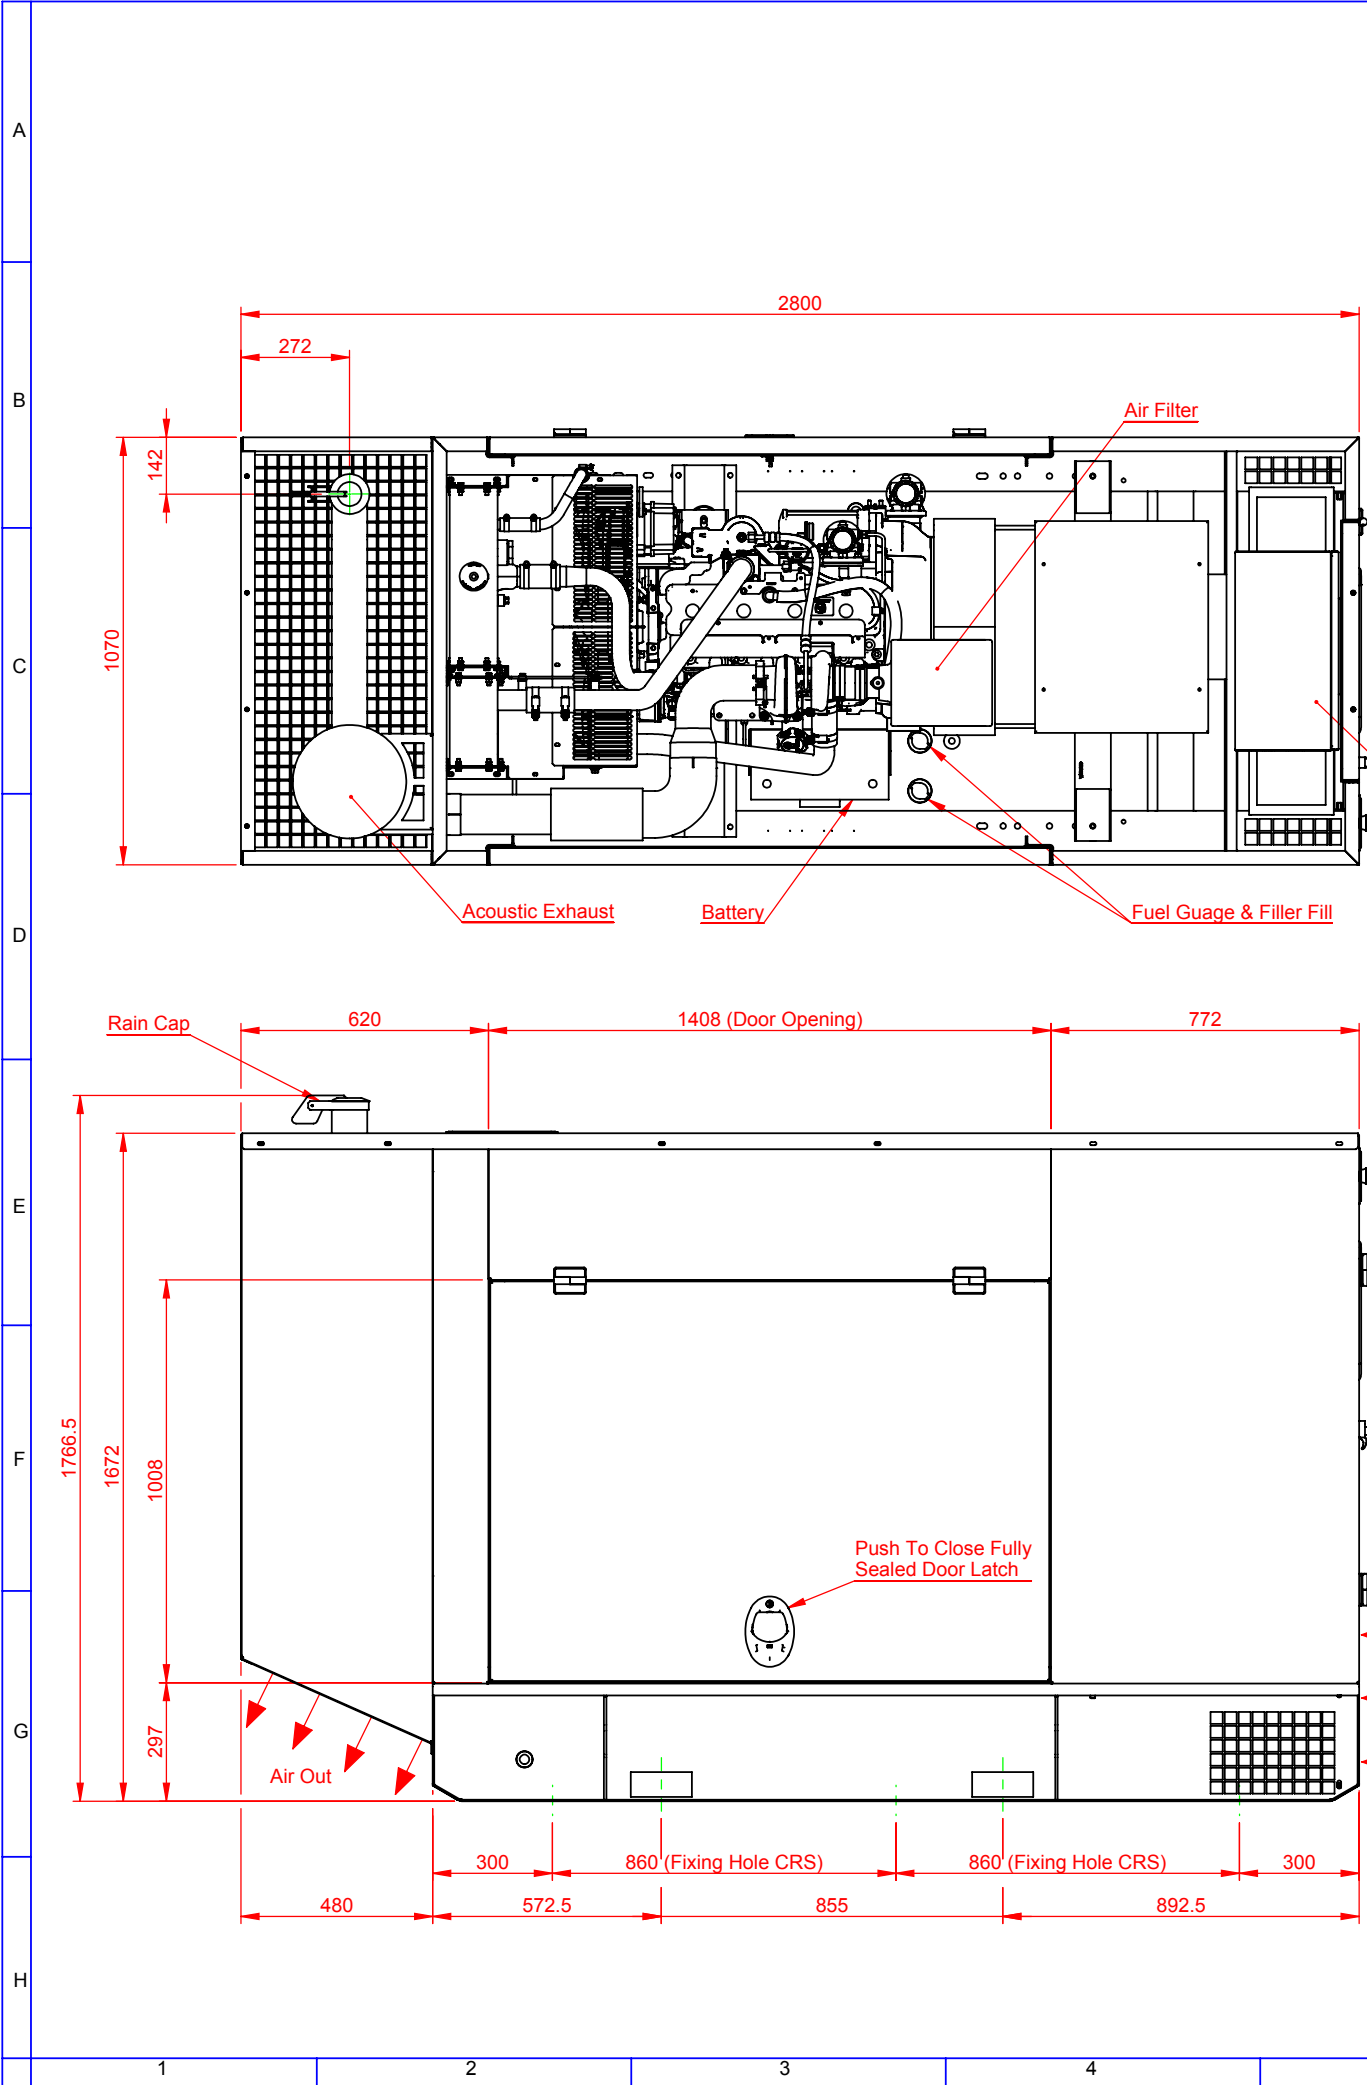


Model Illustrated - BCJD100-60 T3

For Individual Gen Set Model Types See Broadcrown Literature

Useable Fuel Capacity: Integral - Bunded - 230L / Integral - 205L

Generator Is To Be Placed On A Flat Floor Or Concrete Base

BC Ref	Engine	Alternator	Oil Capacity (L)	Cooling Capacity (L)	Dry Weight (kg)	Wet Weight (Kg)
BCJD 70-60	4045 TF158	UCI224 F	12	25	1425	1640
BCJD 80-60	4045 TF258	UCI224 G	12	25	1800	2015
BCJD 100-60	4045 HF158	UCI274 C	12	25	1945	2160
BCJD 50-60 T3	4024 HF285	UCI224 D	7.5	13	1635	1750
BCJD 60-60 T3	5030 HF285	UCI224 F	7.5	13	1855	1970
BCJD 80-60 T3	4045 HF285	UCI224 G	12	15	2055	2170
BCJD 100-60 T3	4045 HF285	UCI274 C	12	15	2075	2190

REV	DETAILS	APP'D	DATE
NOTES - MECHANICAL			
TOLERANCES:			
GENERAL TOLERANCES: +/- 5mm			
FABRICATION: +/- 3mm			
HOLE CENTRES: +/- 1mm			
OTHER TOLERANCES AS OTHERWISE STATED WHERE REQUIRED			
GEOMETRICAL AND OTHER TOLERANCES AS STATED.			
			
THIRD ANGLE PROJECTION			
DESCRIPTION			
Canopy 2 60Hz Sales GA			
SHEET 1 of 1			
CREATED BY:	L.Richards		
DATE:	10.11.2011		
MODIFIED BY:			
DATE:			
CHECKED BY:	P.Rutter		
DATE:	17.11.2011		
ISSUE:	A		
DRAWING No:			
JGA139			
			
Broadcrown Limited (Group Headquarters) Airfield Industrial Estate, Hixon, Stafford, ST18 0PF, United Kingdom. tel: +44 (0) 1889 272200 www.broadcrown.com			
			