

GENPOWER GP1500


Generator Set Model:	GP1500
Standby Power:	1500 Kw (1875 Kva)
Prime Power:	1364 Kw (1705 Kva)
Voltage:	440 V
Frequency:	60 Hz



www.genpowerusa.com

STANDARD FEATURES:

- >Auto Start Control Panel
- >Main Line Circuit Breaker
- >Electronic Governor
- >Electronic Battery Charger
- >Industrial Silencer
- >Dry Type Air Filters
- >Skid and Vibration Isolators
- >User Manual
- >Kim Hotstart Heater & Thermostat

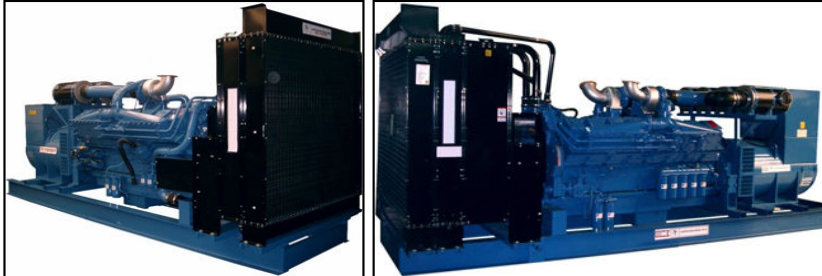

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications
 ESP : The standby power rating is applicable for supplying emergency power in variable load applications

Technical Data

Engine:	Cummins KTA50G9
Alternator:	Stamford PI734C
Gross Engine Power Output:	2220 BHP at 1800 rpm
No. Of Cylinders/Alignment:	16 in V
Bore x Stroke:	159 x 159 mm
Displacement:	50.3 Lts
Piston Speed:	9.5 m / sec
Compression Ratio:	13.9:1
Fuel Consumption:	392.0 Lts / Hrs
Aspiration:	Turbocharged and Low Temp Aftercooled
Electrical System:	24 Volts
Oil Total System Capacity	204.0 Lts
Electric Governor:	Electronic
Water Preheater:	(2x) 1000 Watts (Optional)



Dimensions and Weights

Aprox. Dry Weight:	10,049 Kgs
Aprox. Wet Weight:	10,661 Kgs
Dimensions:	(L) 5.95 mts x (W) 2.00 mts x (H) 2.42 mts

GP1500 GenSet 1500kw (1875kva)

GENERAL POWER LIMITED, INC
 8235 NW 64 Street Suite 2
 Miami, Florida 33166
 Tel 305 471 9566 Fax 305 471 9568
www.genpowerusa.com / info@genpowerusa.com

All data subject to change without prior notice. All names, images and marks are property of their respective owners

