

GENPOWER GP2000


Generator Set Model:	GP2000
Standby Power:	2000 Kw (2500 Kva)
Prime Power:	1818 Kw (2273 Kva)
Voltage:	440 V
Frequency:	60 Hz



www.genpowerusa.com

STANDARD FEATURES:

- >Auto Start Control Panel
- >Kim Hotstart Heater & Thermostat
- >Electronic Governor
- >Industrial Silencer
- >Dry Type Air Filters
- >Skid and Vibration Isolators
- >Electronic Battery Charger
- >User Manual

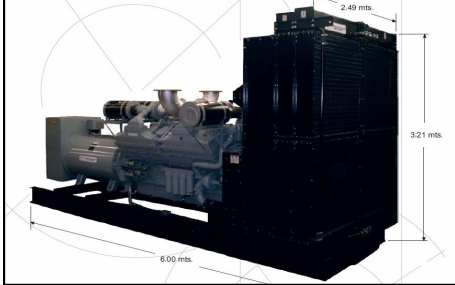

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications
 ESP : The standby power rating is applicable for supplying emergency power in variable load applications

Technical Data

Engine:	Cummins QSK60G6
Alternator:	Stamford PI734F
Gross Engine Power Output:	2922 BHP at 1800 rpm
No. Of Cylinders/Alignment:	16 in V
Bore x Stroke:	159 x 190 mm
Displacement:	60.2 Lts
Piston Speed:	11.4 m / sec
Compression Ratio:	14.5:1 PM
Fuel Consumption:	521.0 Lts / Hrs
Aspiration:	Turbocharged and Aftercooled
Electrical System:	24 Volts
Oil Total System Capacity	280.0 Lts
Electric Governor:	Electronic
Water Preheater:	(2x) 2000 Watts External



Dimensions and Weights

Approx. Dry Weight:	13000 Kgs
Approx. Wet Weight:	13889 Kgs
Dimensions:	(L) 6.00mts x (W) 2.49mts x (H) 3.21mts

GP2000 GenSet 2000kw (2500 kva)

GENERAL POWER LIMITED, INC
 8235 NW 64 Street Suite 2
 Miami, Florida 33166
 Tel 305 471 9566 Fax 305 471 9568
www.genpowerusa.com / info@genpowerusa.com

All data subject to change without prior notice. All names, images and marks are property of their respective owners

