



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

GP-P50-60

**PERKINS 1103A-33TG1 Diesel Engine
STAMFORD CUMMINS UC1224D Alternator
DEESEA DSE7320 Controller**

47 KW PERKINS GENERATOR

47 KW 59 KVA PERKINS Diesel Generator Set, Fully packaged:

- PERKINS Heavy duty diesel engine, 4 stroke, 1800rpm, Electronic
- STAMFORD CUMMINS alternator. IP23 protection, Insulation class H
- Main line circuit breaker, maximum output rated for complete protection
- Digital auto-start/stop control panel. CE and UL compliant
- Incorporated metallic fuel tank for day use. Electronic fuel level sender
- Auto Start control feature included for interoperation with ATS/AMF
- 12V charging alternator and 12V DC electric starter motor
- 12V charged DC starting battery with electrolyte and cables
- Dry type air filter, fuel filter and oil filter elements installed
- Mechanically welded chassis with vibration isolators
- Each unit prototype and individually factory load bank tested
- The generator accepts 100% rated load in one step as per NFPA110 and meets ISO8528-5 class G-3 for transient response
- Compliant with ISO3046, ISO8528, BS4999, BS5514, BS5000PT99, AS1359, IEC34, UTE5100, VDE0530 and ISO9001:2000



AVAILABLE ACCESSORIES AND OPTIONS:

- Steel or Aluminum weather proof, sound attenuated enclosures
- UL142 listed, double wall fuel tanks from 50 to 10,000 Gal
- UL1008 listed, automatic transfer switches from 50 to 3000 Amp
- D.O.T. compliant heavy duty road trailers from 3000 to 30000 Lbs
- Automatic battery chargers, Engine preheaters, Remote annunciators and many more

Voltage	Power ESP kWe/kVA	Power PRP kWe/kVA	Standby Amps	Dimensions - Open	Fuel Tank
480/277	47 / 59	42.4 / 53	71		
460/265	47 / 59	42.4 / 53	74		
440/254	47 / 59	42.4 / 53	77		
240/120 DELTA	47 / 59	42.4 / 53	141		
220/110 DELTA	47 / 59	42.4 / 53	154		
220/127	47 / 59	42.4 / 53	154		
208/120	47 / 59	42.4 / 53	163		

POWER DEFINITION

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

TERM OF USE

Standard reference conditions ESP/PRP 25 C°/25 C° Air Intlet Temp, 1000 m/1000 m m A.S.L. 60 % relative humidity.

WEATHER / SOUND PROOF ENCLOSURES



Dimensions - Enclosed

Weight - Enclosed

Tank

GENERAL POWER LIMITED, INC


9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com

PERKINS DIESEL ENGINE SPECIFICATIONS

GENERAL DATA	Engine model	PERKINS 1103A-33TG1, TURBOCHARGED, 3 Cylinders
	Cylinders-arrangement	3-L
	Displacement	3.3L
	Bore (mm) X Stroke (mm)	105 X 127
	Compression ratio	17.25:1
	Speed (RPM)	1800
	Maximum stand-by power at rated RPM (kW)	55.6KW (74.6HP)
	Frequency regulation (%)	+/-5.0%
	Governor	MECHANICAL
FUEL SYSTEM	Fuel consumption 100% load	12.9 L/hr [3.4 Gal/hr]
	Fuel consumption 75% load	9.9 L/hr [2.6 Gal/hr]
	Fuel consumption 50% load	7.1 L/hr [1.9 Gal/hr]

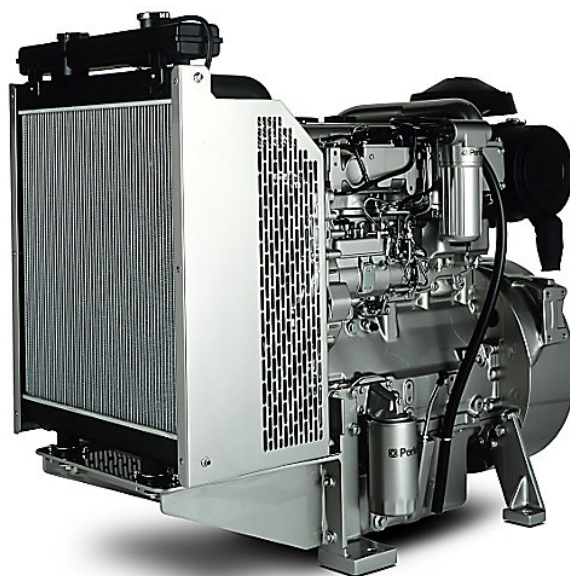

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

STAMFORD CUMMINS ALTERNATOR SPECIFICATIONS

GENERAL DATA	Alternator brand	STAMFORD (CUMMINS GENERATOR TECHNOLOGIES)
	Alternator	UCI224D
	Number of phase	3
	Power factor (Cos Phi)	0.8
	Altitude (m)	<1000
	Overspeed (rpm)	2250
	Number of pole	4
	Excitation system	Self Excited (P.M.G. Optional)
	Insulation class / Temperature class	H / H
	Automatic Voltage Regulator	STAMFORD SX460
	Coupling	Direct / Single Bearing
	Voltage regulation 0 to 100%	+/-1.0%



Generator Technologies

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com



Diesel Generators 10 - 3200 Kw | Alternators 5 - 3500 Kva | Transfer Switches | Fuel Tanks | Trailers | Engine Parts | Alternator Parts
SDMO | KOHLER | BROADCROWN | HIPOWER | JOHN DEERE | CUMMINS | PERKINS | MITSUBISHI | VOLVO | STAMFORD | LEROY SOMER

GENERATOR CONTROL PANELS

Standard

DEEPSEA DSE 7320: Digital + Auto start/stop



The Deepsea DSE 7320 control features both Manual and Automatic start/stop control of the generator and full CANBUS connectivity for control and protection. The 132x64 LCD display, Emergency stop button and five key menu are highly ergonomic and intuitive.

- Fully configurable via a free downloadable PC software
- 250 events log including date and time make fault finding effortless
- Remote monitoring and control via Ethernet/RS485 and SMS messaging via GSM/SIM card options available
- Coolant temperature and Oil pressure alarm/shutdown
- Oil pressure and low pressure alarm/shutdown
- Oil temp, hours, battery charge, Frequency, Kw, KVA and PF display
- Voltage under/over protection, Amp over current protection, and More!

Option

DEEPSEA DSE 8610: Digital + Auto start/stop + Paralleling



The Deepsea DSE 8610 control features all the excellent capabilities of the DSE 7320 combined with easy to use multi-generator load sharing:

- Up to 32 generators paralleling
- Peak lopping
- Sequential starting of generator sets
- Manual voltage/frequency adjustments
- Automatic hours run balancing
- Generator load demand
- Dead bus sensing and Bus failure detection
- Voltage frequency matching
- And many more highly programmable paralleling features

GENERATOR ACCESSORIES AND OPTIONS

Option

Automatic Transfer Switches, UL1008 listed: 100 to 4000A



With a Series 300 transfer switch, you get a product backed by ASCO Power Technologies, the industry leader

- True double-throw operation: single solenoid design is inherently interlocked & prevents contacts from stopping between sources
- Easy-to-read flush-mounted control and display panel provides LED indicators for switch position and source availability
- Standard engine exerciser for weekly automatic testing with or without load
- UL 1008 listed for Transfer Equipment and CSA C22.2 listed
- NFPA 110 for Emergency & Standby Power & the National Electrical (NEC) Articles 700, 701 and 702

Option

Fuel Tanks, UL142 listed: 50 to 5000 GAL



- UL listed. Secondary containment tank meeting UL 142 tank requirements
- NFPA compliant. Designed to comply with the installation standards of NFPA 30 and NFPA 37
- Emergency pressure relief vents. Meets UL requirements; ensures adequate venting of inner and outer tank under extreme pressure and/or emergency conditions
- Electrical stub-up area with removable end channel
- Normal vent • Inner tank emergency vent sized to UL 142 specs
- Direct reading mechanical fuel gauge • Fuel in basin switch
- Satin black paint finish

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.diesलगeneratorsmiami.com generators@genpowerusa.com

G

**Weatherproof / Super Silent
Enclosure**

STANDARD FEATURES

- 12 gauge electro-zinc powder coated steel for maximum corrosion resistance (Phosphatizing degreasing, Non-chromic passivation, Osmosis purified rinsing and High durability polyester resin thermosetting powder paint)
- 29dB(A) Internal-mounted critical silencer and flexible exhaust connector offering maximum component life and operator safety
- Fade-, scratch-, and corrosion-resistant. Automotive-grade textured finish resulting in advanced corrosion and abrasion protection as well as enhanced edge coverage and color retention
- Up to 51mm (2in) Acoustic insulation with hydrocarbon sealing film that meets FMVSS 302 flammability classification and repels moisture absorption
- Interchangeable modular panel construction. Allows complete serviceability or replacement without compromising enclosure design
- Service access. Multi-personnel doors for easy access to generator set controller, breaker and service points
- Externally mounted emergency stop button, Single point lifting hook and Tamper proof "securit" viewing control window
- Cooling air discharge. Weather protective design featuring a vertical air discharge outlet grille. Redirects cooling air up and above enclosure to reduce ambient noise
- Cooling/combustion air intake with a horizontal air inlet. Sized for maximum cooling airflow
- Heavy duty Polyamide plastic hinges, Dichromate galvanized bolting and Stainless steel rivets for lifetime longevity
- Meets and exceeds NFX41002 Salt spray test, NFT30049 UV Performance test, NFT30038 Paint adhesion test and 2000/14EC Low sound directives



Model	Sound level			Dimensions (in)	Weight (lbs)	Tank
	dB(A)@3ft	dB(A)@23ft	LWA			
GP-P50-60						

GENERAL POWER LIMITED, INC

9930 NW 21st Street / Miami, Florida 33172 / USA

(P) 305 471 9566 (P) 1 888 POWER58

www.genpowerusa.com www.dieselgeneratorsmiami.com generators@genpowerusa.com