

DSE8610

SYNCHRONISING AUTO START LOAD SHARE CONTROL MODULE

FEATURES



The DSE8610 is an easy to use Synchronising Auto Start Control Module suitable for use in a multi-generator loadshare system, designed to synchronise up to 32 generators including electronic and non-electronic engines.

The DSE8610 monitors the generator and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.

System alarms are annunciated on the LCD screen (multiple language options available), illuminated LED and audible sounder.

The event log will record 250 events to facilitate easy maintenance. An extensive number of fixed and flexible monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.

Using the DSE PC Configuration Suite Software allows easy alteration of the operational sequences, timers and alarms. With all communication ports capable of being active at the same time, the DSE8610 is ideal for a wide variety of demanding load share applications.

KEY LOAD SHARE FEATURES:

- Peak lopping/sharing (with DSExx60)
- Sequential set start
- Manual voltage/frequency adjustment
- R.O.C.O.F. and vector shift protection
- Generator load demand
- Automatic hours run balancing
- Mains (Utility) de-coupling
- Mains (Utility) de-coupling test mode
- Dead bus sensing
- Bus failure detection
- Direct governor and AVR control
- Volts and frequency matching
- kW and kV Ar load sharing
- Dead bus synchronising

ENVIRONMENTAL TESTING STANDARDS

ELECTRO MAGNETIC COMPATIBILITY
 BS EN 61000-6-2
 EMC Generic Immunity Standard for the Industrial Environment
 BS EN 61000-6-4
 EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY
 BS EN 60950
 Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE
 BS EN 60068
 Ab/Ae Cold Test -30°C
 BS EN 60068-2-2
 Bb/Be Dry Heat +70°C


VIBRATION
 BS EN 60068-2-6
 Ten sweeps in each of three major axes
 5Hz to 8Hz @ +/-7.5mm, 8Hz to 500Hz @ 2gn

HUMIDITY
 BS EN 60068-2-30
 Db Damp Heat Cyclic 20/55°C @ 95% RH
 48 Hours
 BS EN 60068-2-78
 Cab Damp Heat Static 40°C @ 93% RH
 48 Hours

SHOCK
 BS EN 60068-2-27
 Three shocks in each of three major axes
 15gn in 11mS

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES
 BS EN 60529
 IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF LOAD SHARE APPLICATIONS

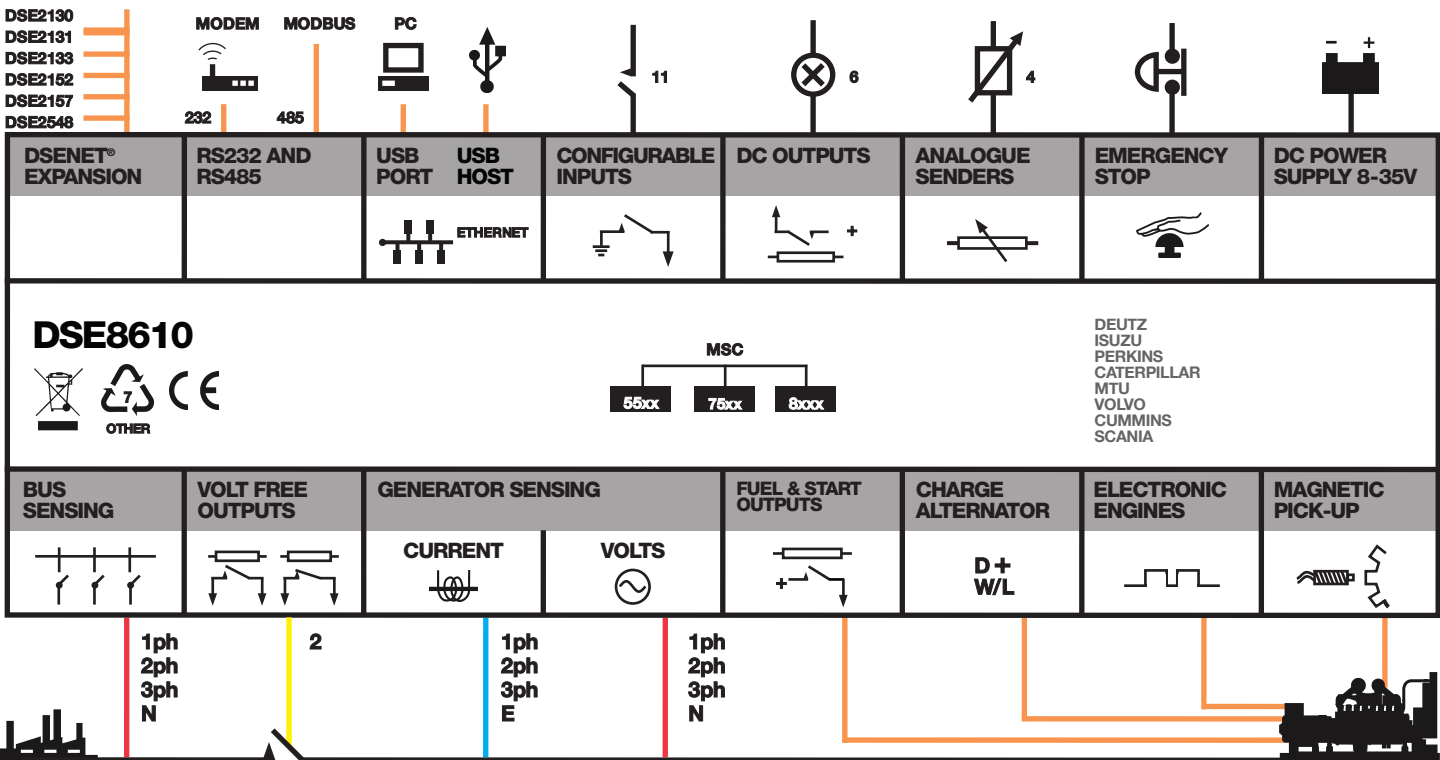

DSE8610

SYNCHRONISING AUTO START LOAD SHARE CONTROL MODULE

FEATURES



KEY FEATURES

- Comprehensive synchronising & loadsharing capabilities
- Built-in governor and AVR control
- Base load (kW export) functionality
- Positive & negative kVar export control
- Mains (utility) de-coupling protection
- Generator power (kW, kV Ar, kV A & pf) monitoring
- Overload (kW & kV Ar) protection
- Reverse power (kW & kV Ar) protection
- Unbalanced load protection
- Independent earth fault protection
- Advanced integral PLC editor
- 11 Configurable inputs
- 8 Configurable outputs
- Configurable flexible sensor inputs
- DSENet® expansion compatibility
- User configurable RS232, RS485 and Ethernet communications
- Remote SCADA monitoring via various DSE software applications
- MODBUS RTU & TCP support
- User configurable MODBUS pages
- Advanced SMS control and fault messaging (additional GSM modem required)
- Easy access diagnostic pages including modem diagnostic pages
- Data logging and trending

- CAN, MPU and Frequency speed sensing
- Tier 4 CAN engine support
- “Protections disabled” feature
- Front panel editing with PIN protection
- Fully configurable using DSE Configuration Suite PC software via USB
- 4 Line back-lit LCD text display
- LED and LCD alarm indication
- Configurable display languages
- USB connectivity
- Customisable status screens
- Five key menu navigation
- 3 Configurable maintenance alarms
- Multiple date and time run scheduler
- Manual fuel pump control
- Fuel usage monitor and low fuel level protection
- Charge alternator failure protection
- Load switching (load shedding and dummy load control)
- Configurable event log (250)
- Backed up real time clock

KEY BENEFITS

- Compatible in load share systems containing DSE5500, DSE7500 and DSE8600 series. Contact DSE for further details
- 132 x 64 pixel ratio display for clarity
- Real-time clock provides accurate event logging
- Ethernet communication, provides built in advanced remote monitoring.
- Can be integrated into building management systems (BMS) and programmable logic control (PLC)
- Increased input and output expansion capability via DSENet®
- Licence-free PC software
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- Advanced Internal PLC editor allows user configurable functions to meet specific application requirements.

EXPANSION DEVICES

- DSE124 CAN/MSC Extender
- DSE2130 Input Expansion Module
- DSE2131 Ratio-metric Input Expansion Module
- DSE2133 RTD & Thermo-couple Expansion Module
- DSE2152 Ratio-metric Output Expansion Module
- DSE2157 Output Expansion Module
- DSE2548 LED Expansion Module

RELATED MATERIALS

TITLE
DSE8610 Installation Instructions
DSE8610 Operator Manual
DSE8600 PC Configuration Suite Manual
DSE8660 Date Sheet

PART NO'S

053-069
057-115
057-119
055-086

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING
8 V to 35 V continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

MAXIMUM OPERATING CURRENT

460 mA at 12 V, 245 mA at 24 V

MAXIMUM STANDBY CURRENT

375 mA at 12 V, 200 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

OUTPUTS

OUTPUT A (FUEL)

15 A DC at supply voltage

OUTPUT B (START)

15 A DC at supply voltage

OUTPUTS C & D

8 A AC at 250 V AC (Volt free)

AUXILIARY OUTPUTS E,F,G,H,I & J

2 A DC at supply voltage

GENERATOR & BUS

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICK-UP

VOLTAGE RANGE

+/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

BUILT-IN GOVERNOR CONTROL

MINIMUM LOAD IMPEDANCE

1000Ω

Fully isolated

GAIN VOLTAGE

0 V to 10 V DC

Fully isolated

OFFSET VOLTAGE

+/- 10 V DC

Fully isolated

BUILT-IN AVR CONTROL

MINIMUM LOAD IMPEDANCE

1000Ω

Fully isolated

GAIN VOLTAGE

0 V to 10 V DC

Fully isolated

OFFSET VOLTAGE

+/- 10 V DC

Fully isolated

DIMENSIONS

OVERALL

240 mm x 181 mm x 42 mm
9.4" x 6.8" x 1.6"

PANEL CUTOUT

220 mm x 160 mm
8.7" x 6.3"

MAXIMUM PANEL THICKNESS

8 mm

0.3"

OPERATING TEMPERATURE RANGE

-30 °C to +70 °C

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C